

# BRITZ®



## Model: BRITZ 9398

- Current Rating : 13A
- Standard : BS1363A
- SS145/A
- MS589/A
- Voltage Rating : 250V
- Material : Polycarbonate (Unbreakable)
- Colour : White



## Model: BRITZ 9398L

- Current Rating : 13A
- Standard : BS1363A
- SS145/A
- MS589/A
- Voltage Rating : 250V
- Material : Polycarbonate (Unbreakable)
- Colour : White
- LED Neon



## Model: BRITZ 9515

- Current Rating : 15A
- Standard : BS546
- SS472
- MS1577
- Voltage Rating : 250V
- Material : Polycarbonate (Unbreakable)
- Colour : White



# BRITZ®



## Model: TP-711

- Product Spec : 3-5mm X 140mm
- Voltage Rating : 100v-500v
- Colour : Clear Plastic
- Smart Neon Indicator With Tag



## Model: TP-712

- Product Spec : 4.0mm X 205mm
- Voltage Rating : 100v-500v
- Colour : Clear Plastic
- Smart Neon Indicator With Tag



## Model: TP-713

- Product Spec : 3.5mm X 160mm
- Voltage Rating : 100v-500v
- Colour : RED
- Smart Neon 2 Way Crossover Design



STANDARDSLOT(-)



PHILIPS(+)

# BRITZ®

## PVC Cover



# BRITZ®

## Connector





## Fuse



# BRITZ®

## PVC Box

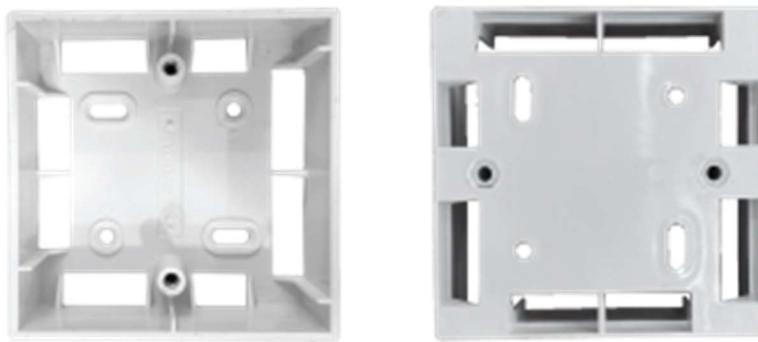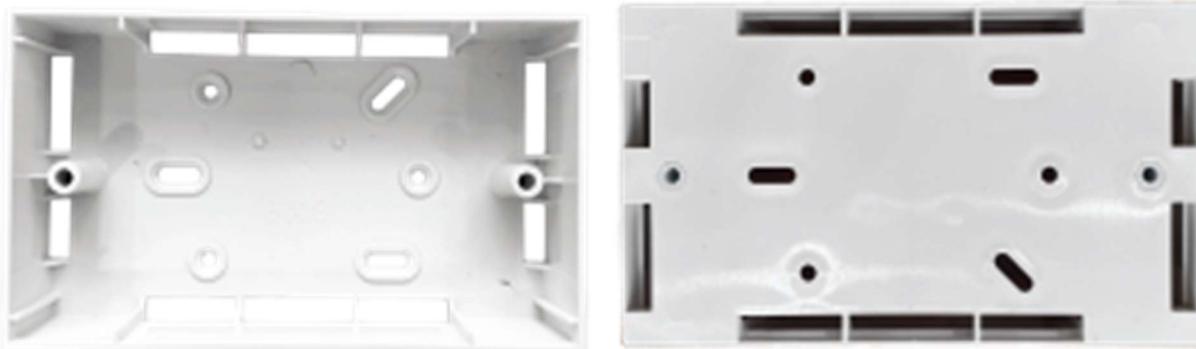

## PVC Plate



# BRITZ®

---

## PVC Box



# BRITZ®

## Lamp Holder



# BRITZ®

## Power Cord



## Cable Clip



# BRITZ®






## Description

- 24 Hour Mechanical Timer - With 15 minute segments
- Simple to Use - Simply press down the segments when you want your device to turn on
- Ideal for Indoor Power Applications - Great for slow cookers, lighting, fish tanks and more
- Manual Override Function - Override the timer to power the connected device

## Operation Instruction


- Turn the disc clockwise until the arrow is pointing to the current time.
- Push the slice down according to your desired work time. Each slice corresponds to 15 minutes.
- Push switch down to  for timer function. Simply push up to ON for constant power and override timer function.
- Plug in timer and connect your device to the timer.

## Model: BR-TM-01 / BR-TM-02U

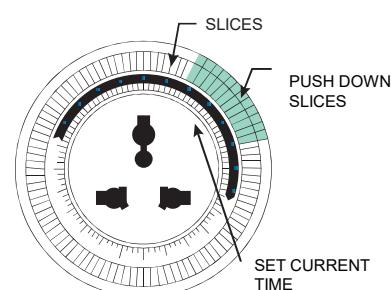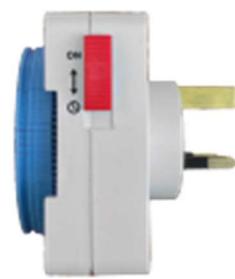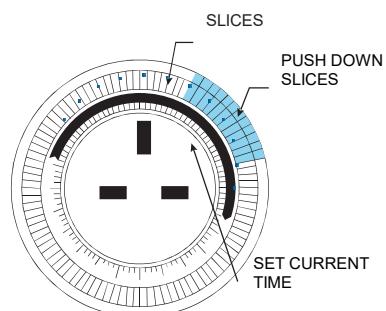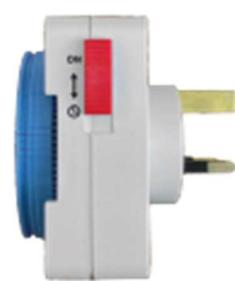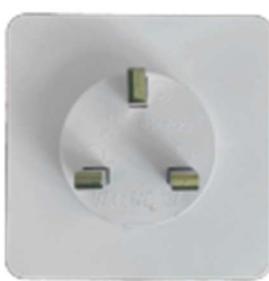

## Dimension (mm)

Model	H(mm)	L(mm)	W(mm)
BR-TM-01	74	74	55
BR-TM-02U	74	74	55

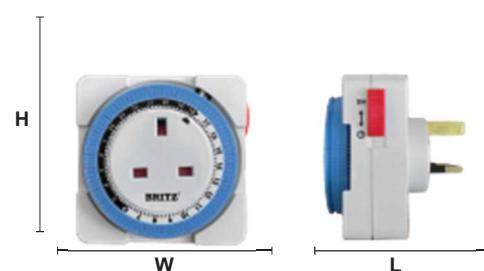

# BRITZ®

## Model: BR-MK107


### Description

The LED mosquito killer can be used in bedrooms, living hall, office or any indoor place that require killing of mosquitos and flying insects. The energy saving LED light is designed for prolonged usage without the need to replace any tube. It is safe for children and mothers to use the mosquito killer.



### Specification:

- Input : AC110-250V
- Cable Length : 1M
- Coverage Area : 25M2
- Power : 6W Energy Saving
- Rated Frequency : 50/60Hz
- Suitability : Safe for Pets & Children

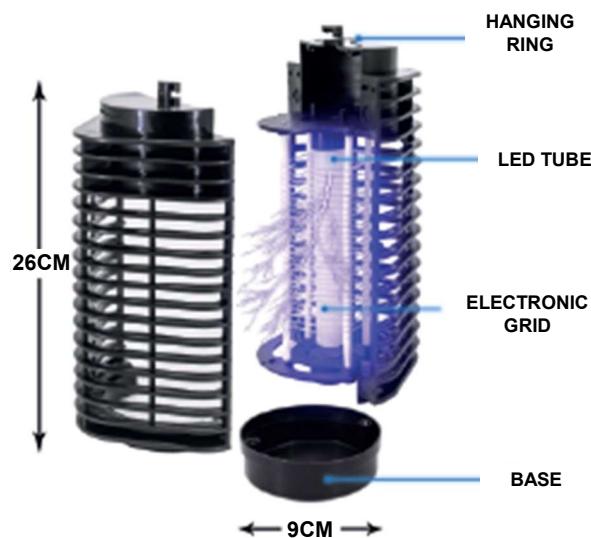

NO NEED TO  
REPLACE TUBE



LONG  
LASTING LED



STOPS  
DENGUE



25M<sup>2</sup>  
RADIUS



NOISE  
FREE



CHILD  
FRIENDLY




PET  
FRIENDLY

# BRITZ®

## Model: BR-MCE113A


### BRITZ 13A 1GANG SWITCH SOCKET OUTLET METAL-CLAD

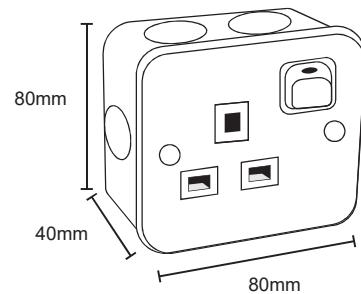

- Voltage Rating : 250V AC
- Current Rating : 13A socket
- Nominal plate size : 800 x 80mm
- Minimum wall box depth : 40mm
- IP Rating : IP4X
- Pack (carton / box) : 50pcs

## Model: BR-MCE213A

### BRITZ 13A 1GANG SWITCH SOCKET OUTLET METAL-CLAD

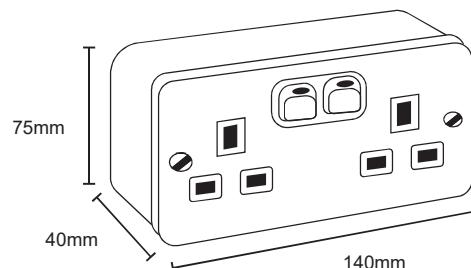

- Voltage Rating : 250V AC
- Current Rating : 13A per socket
- Nominal plate size : 140 x 75mm
- Minimum wall box depth : 40mm
- IP Rating : IP4X
- Pack (carton / box) : 30pcs

# BRITZ®

## Model: VOLTAGE TESTER WITH SMART INDICATOR AND BUZZER



- Dimension : 14 x 1.8cm
- Battery : 2x AG13 Button Battery
- Material : ABS

## Model: 1.5V – 9V BATTERY TESTER



- Voltage Rating : 1.5V to 9V
- Material : ABS
- Dimension : 6 x 11cm

# BRITZ®

## Model: UK TO SCHUKO ADAPTER WITH FUSE PROTECTION



## Model: BIG SOUTH AFRICA TO UNIVERSAL ADAPTER WITH SAFETY SHUTTER



# BRITZ®



## Model: DT-830D

### Description

- DC Power Voltage : 200M / 2000M / 20V / 200V / 1000V
- AC Power Voltage : 200V / 750V
- Dimension : 12 x 6.8 x 2.5cm
- LCD Screen : 4.6 x 1.4cm



## Model: DT-6222

### Description

- DC Power Voltage : 200M / 2000M / 20V / 200V / 1000V
- AC Power Voltage : 200V / 750V
- Dimension : 12 x 6.8 x 2.5cm



## Model: YX-360

### Description

- DC Power Voltage : 200M / 2000M / 20V / 200V / 1000V
- AC Power Voltage : 200V / 750V
- Dimension : 14.8 x 10 x 3.5cm

# BRITZ®

## Model: 536 Headlight

### Description

- Battery : 3x AAA Batteries
- Function : On / Off
- Dimension : 8 x 4.3 x 3cm
- LED Chip : Extra Bright COB



## Model: 603 Headlight

### Description

- Battery : 3x AAA Batteries
- Function : Intense / Weak / SOS
- Dimension : 8 x 4.3 x 3cm
- LED Chip : Extra Bright COB

# BRITZ®

## Model: BR-ST501 Socket Tester W/ RCD Test

### Description

- Color: Black
- Material: Flame Retardant ABS
- Plug Type: UK
- Dimensions: 7.5x7.4x7.3cm (100g)
- RCD Working Voltage: 220V±20V
- Voltage: 48V-250V 45-65Hz



- **Bright LED Light & 3 Test Indicators:** The tester adopts a built-in light so it can also be used in the dark. Easy to read and immediate test result.
- **Advanced Socket Tester:** Rapidly detect whether the socket's wire connection is correct.
- **Easy To Use:** - Detect whether neutral, live and earth wire is connected correctly and to indicate which wire is missing with clear light patterns.
- **RCD/GFCI Test Button** – RCD/GFCI function can test the electrical system by tripping the main ELCB. Perfect for protecting your security against potential risk of electrical hazards.

# BRITZ®



## Description:

- Modern Frameless Plate Design
- Durable and Long Lasting Mechanism
- Safety Mark Approved

## Frameless 1 Way Flushed Switches



**Model:1W1S-1**

**Model:1W2S-1**

**Model:1W3S-1**

**Model:1W4S-1**

## Frameless 2 Way Flushed Switches



**Model:1W1S-2**

**Model:1W2S-2**

**Model:1W3S-2**

# BRITZ®



## 1 & 2 Gang 13A Switched Socket



**Model:1W1G**

**Model:1W2G**

## 1 & 2 Gang 13A Switched Socket With Neon



**Model:1W1GNF**

**Model:1W2GNF**

# BRITZ®



## 15A Switch Socket (For Aircon/Heater Use)



Model: 15A Socket

## 20A Heater Switch With LED Indicator




Model: 20A Heater

# BRITZ®

## 16Amp 250V 3pin Polarised Connector (male&female)


- Model: LS16
- Inner Material : Full Copper Connection
- Outer Material : Fire Retardant Polymer
- Voltage Rating: 250V
- Current Rating: 16A
- Hole Size : 2.5mm wire
- Connection: Socket (3x2.5mm) Plug (3x2.5mm)
- Certification: IEC 60998-2-1:2002 / TUV
- Size: 39.5X 31 X16.5mm
- Listed Under:HDB List of Approved Materials

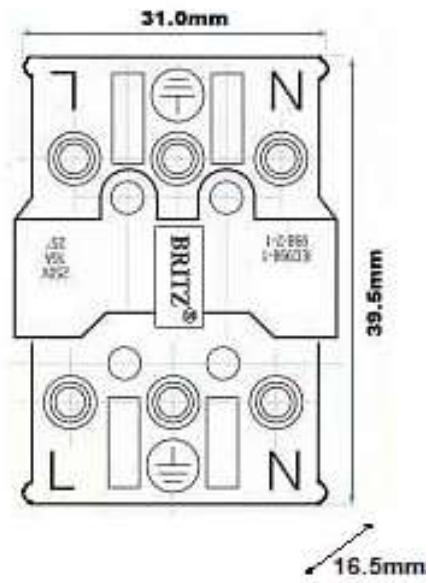

# BRITZ®

## 16Amp 250V 3pin Polarised Connector (male&female)

- Model: KS-2.5
- Inner Material : Full Copper Connection
- Outer Material : Fire Retardant Polymer
- Voltage Rating: 250V
- Current Rating: 16A
- Hole Size : 2.5mm wire
- Connection: Socket (3x2.5mm) Plug (3x2.5mm)
- Certification: IEC 60998-2-1 IEC 60998-1
- Size: 39.5X 23.5 X16.5mm
- Listed Under:HDB List of Approved Materials

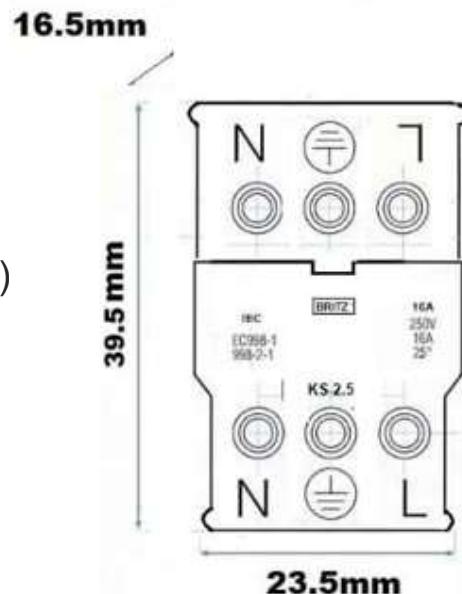

# BRITZ®

## Model: SW-2UAC

### BRITZ 1A+1C PD 20W USB WALL SOCKET




## Model: SW-4UAC

### BRITZ 2A+2C PD 20W USB WALL SOCKET



- 20W Type-C Fast Charging (Actual test)
- USB-A Universal Port
- Minimalist modern design
- Suitable for 1 gang box
- Ideal for **bedrooms ,offices, hotels**

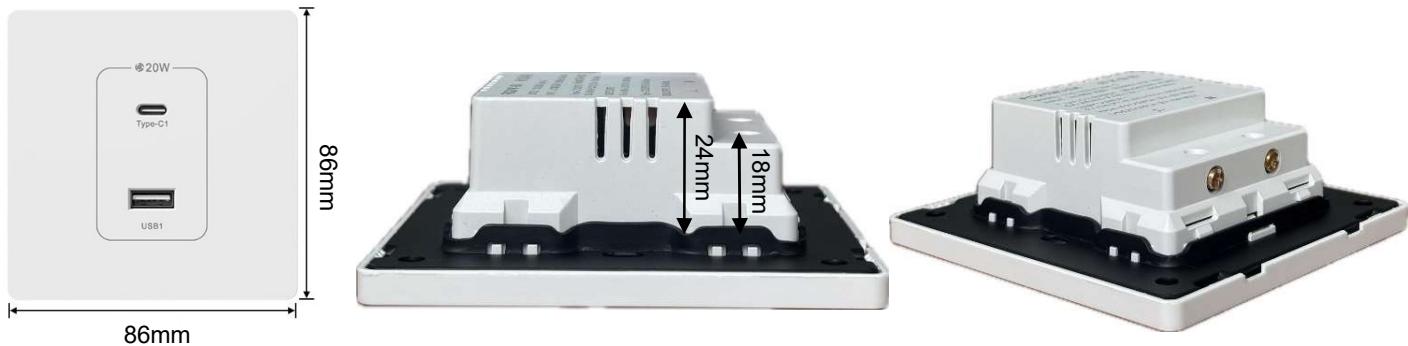

# BRITZ®



## Model: BR-558L

### Description

- AC Input Power : 250V
- Frequency Range : 50Hz
- Rated Current : 13AMAX
- Approved Standard : SS246 MS589 BS5733
- Approved Standard : SASO2203 BS 1363
- (Singapore Approved Standard)
- Power : 3250 WATTS MAX
- Fused Protection : 13A
- Neon Light : Yes
- 2-Pin Friendly : Yes



Direct 2-PIN Plug in

# BRITZ®



## Model: BR-221U

### Description

- AC Input Power : 230V- 250V
- USB Output Power : DC 5V 2100mA
- Frequency Range : 50/60Hz
- Rated Current : 13AMAX
- Approved Standard : SS246  
(Singapore Approved Standard)
- Power : 3250 WATTS MAX



2USB Outlet



Direct 2-PIN Plug in

# BRITZ®



## Model: BR-928

### Description

- AC Input Power : 230V- 250V
- Frequency Range : 50/60Hz
- Rated Current : 13AMAX
- Approved Standard : SS246  
(Singapore Approved Standard)
- Power : 3250 WATTS MAX



# BRITZ®




## Model: BR-928L

### Description

- AC Input Power : 230V- 250V
- Frequency Range : 50/60Hz
- Rated Current : 13AMAX
- Approved Standard : SS246
- Power (Singapore Approved Standard) : 3250 WATTS MAX
- LED Neon



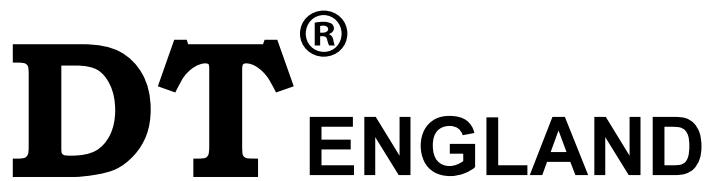

## Model: DT-10

### Description

- AC Input Power : 230V- 250V
- Frequency Range : 50/60Hz
- Rated Current : 13AMAX
- Approved Standard : SS246  
(Singapore Approved Standard)
- Power : 3250 MAX



COLOURED  
SWITCHES



SMART  
INDICATOR



FUSE  
PROTECTION



FIRE  
RETARDANT



SAFETY  
SHUTTER



3 X 13A  
OUTLET



OVERLOAD  
PROTECTION

# BRITZ®



Neon Light

Safety Shutter



Model: TR-5

U.S.A, Canada, Japan,  
Taiwan, Philippines,  
China



Model: TR-6

U.S.A, Canada, Japan,  
Taiwan, Philippines,  
China, Thailand



Model: TR-7

Singapore, Malaysia,  
Hong Kong, UK England,  
Dubai



Model: TR-9

Korea, Indonesia,  
France



Model: TR-9A

China, Thailand, Philippines,  
Europe, South America, Chile,  
Uruguay, Paraguay



Model: TR-9B

China, Thailand,  
Philippines, Europe,  
South America, Chile



Model: TR-9C

Denmark, Spain, Portugal,  
Belgium, Finland, Netherland,  
Norway, Sweden, Italy



Model: TR-10

England, Small South Africa



Model: TR-15

Large South Africa, 15Amp



Model: TR-16

China, Australia,  
New Zealand



Model: TR-17

China, Australia,  
New Zealand

**Model: MWT-6(6020)**

U.S.A, Canada, Japan,  
Taiwan, Philippines, China,  
Thailand

**Model: MWT-7(6040)**

Singapore, Malaysia,  
Hong Kong, UK England,  
Dubai

**Model: MWT-9A(6030)**

China, Thailand, Philippines,  
Europe, South America, Chile,  
Uruguay, Paraguay

**Model: MWT-9B(6030)**

China, Thailand,  
Philippines, Europe,  
South America, Chile,  
Uruguay, Paraguay

**Model: MWT-10(6000)**

England, South Africa

**Model: MWT-16(6050)**

China, Australia, New  
Zealand



China, Australia, New Zealand

Korea, Indonesia,  
France

# BRITZ®

## Model: RCD 08 (ELCB Adaptor)

### Description

RCD 08 10mA adaptor for added protection against the risk of electric shock. It instantly cuts the power in the event of an earth connection leakage. It is latching, therefore power needs not to be reset at each use and it is ideal for home appliance spike protection .



### **Active (Non-Latching) Type -**

When power is cut to the device. The RCD will trip DO NO need to be RESET RCD Protection - Against the risk of fatal electric shocks

Adaptor - Simply plug in the tool or device you want to use  
40ms Trip Speed - To provide fast protection

### Operating instructions

STAGE 1 • Insert the RCD adaptor into a 13 amp mains socket and switch on.

STAGE 2 • Press the RESET button. The RED indicator should appear.

STAGE 3 • Press the TEST button. The RED indicator will disappear from the CLEAR window.


**• DO NOT USE IF THE RED INDICATOR REMAINS.**

STAGE 4 • Press the RESET button. The RCD has now been set for safe use provided the RED indicator shows in the CLEAR window.

Latching RCDs do trip during power cuts but they automatically reset once the power returns, so they are great for fridges, freezers, Refrigeration, Frost watchers, Aquariums, Chargers

### Technical Specification:

- Voltage Rating : AC240V 50Hz
- Current Rating : 13A
- Rated Tripping Current : 10mA
- Operating Speed : <40mS
- Environmental Protection : IP2x
- Type Tested to : BS 7071 - 1992  
BS 1363 - 1984

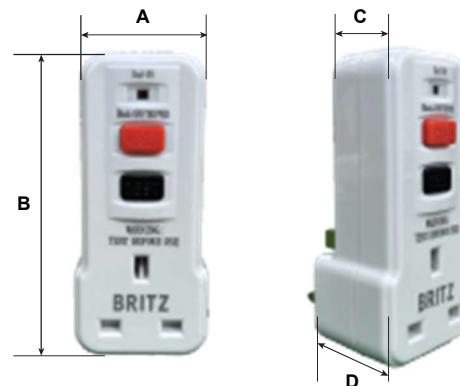

### Dimension

A: 44MM  
B: 110mm  
C: 36MM  
D: 39mm



# BRITZ®

## Model: RCD 11

### Description

BRITZ Safety Model: RCD 11 10mA adaptor for added protection against the risk of electric shock. It instantly cuts the power in the event of an earth connection leakage. It is non-latching, therefore power needs to be reset at each use and it is ideal for home appliance spike protection.



### Active (Non-Latching) Type -

When power is cut to the device, the RCD will trip and NEED to be RESET  
RCD Protection - Against the risk of fatal electric shocks

Adaptor - Simply plug in the tool or device you want to use  
40ms Trip Speed - To provide fast protection

### Operating instructions

STAGE 1 • Insert the RCD adaptor into a 13 amp mains socket and switch on.

STAGE 2 • Press the RESET button. The RED indicator should appear.


STAGE 3 • Press the TEST button. The RED indicator will disappear from the CLEAR window.

• **DO NOT USE IF THE ORANGE INDICATOR REMAINS.**

STAGE 4 • Press the RESET button. The RCD has now been set for safe use provided the RED indicator shows in the CLEAR window.

### Technical Specification:

- Voltage Rating : AC240V 50Hz
- Current Rating : 13A
- Rated Tripping Current : 10mA
- Operating Speed : <40mS
- Environmental Protection : IP2x
- Type Tested to : BS 7071 - 1992  
BS 1363 - 1984

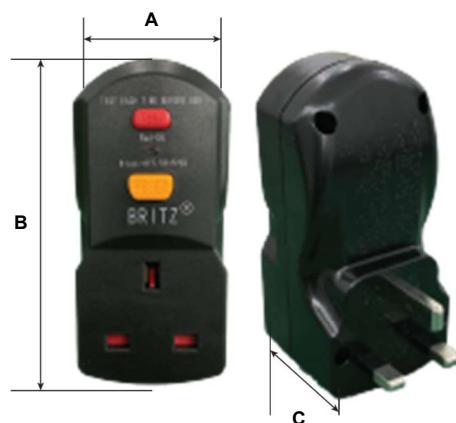

### Dimension

A: 50MM B: 105MM C: 44.7MM

# BRITZ®

## Model: RCD 12

### Description

RCD 12 10mA plug for added protection against the risk of electric shock. It instantly cuts the power in the event of an earth connection leakage. It is non-latching, therefore power needs to be reset at each use and it is ideal for home appliance spike protection.



### **Active (Non-Latching) Type -**

When power is cut to the device, the RCD will trip and have to be RESET RCD Protection - against the risk of fatal electric shocks

Adaptor - simply plug in the tool or device you want to use  
40ms Trip Speed - to provide fast protection

### Operating instructions

STAGE 1 • Insert the RCD plug into a 13 amp mains socket and switch on.

STAGE 2 • Press the RESET button. The RED indicator should appear.


STAGE 3 • Press the TEST button. The RED indicator will disappear from the CLEAR window.

**• DO NOT USE IF THE RED INDICATOR REMAINS.**

STAGE 4 • Press the RESET button. The RCD has now been set for safe use provided the RED indicator shows in the CLEAR window.

### Technical Specification:

- Voltage Rating : AC250V 50Hz
- Current Rating : 13A
- Rated Tripping Current : 10mA
- Operating Speed : <40ms
- Environmental Protection : IP55
- Type Tested to : BS 7071 - 1992

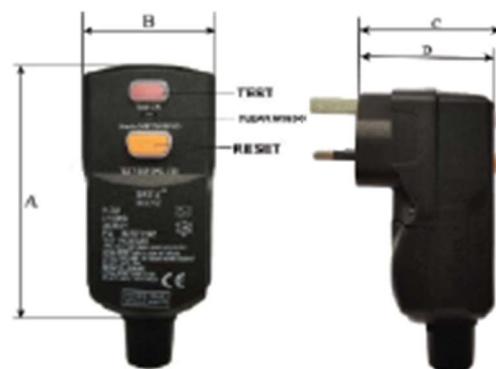

### Dimension

A: 105MM  
B: 50mm

C: 54MM  
D: 51mm

# BRITZ®

## Model: BR-868U / 868UBK

### Features

- Safety Shutter
- LED Power Indicator
- All-in-one adapter
- Useable in over 150 countries : United Kingdom, Europe, Australia, New Zealand, Africa, Canada, India, Singapore, Malaysia and so on



**SURGE  
PROTECTION**

### Specifications

- |                     |                     |
|---------------------|---------------------|
| • Electrical rating | : 125V 6A, 250V 13A |
| • Size              | : 73*47*40mm        |
| • Weight            | : 77g               |



**1A+1C USB  
Charger**



### Dimension (mm)

Model	H(mm)	L(mm)	W(mm)
BR-868U	74	47	37
BR-868UBK	74	47	37



# BRITZ®

## Model: BR-838 / 838BK

### Features

- Safety Shutter
- LED Power Indicator
- All-in-one adapter
- Useable in over 150 countries : United Kingdom, Europe, Australia, New Zealand, Africa, Canada, India, Singapore, Malaysia and so on

### Specifications

- |                     |                     |
|---------------------|---------------------|
| • Electrical rating | : 125V 6A, 250V 13A |
| • Size              | : 73*47*40mm        |
| • Weight            | : 77g               |




**SURGE  
PROTECTION**



### Dimension (mm)

Model	H(mm)	L(mm)	W(mm)
BR-838	74	47	37
BR-838BK	74	47	37

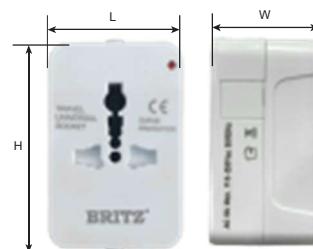

# BRITZ®



## Model: BR-232C

### Description

- AC Input Power : 230V - 250V
- USB Output Power : DC 5V 2100mA
- Frequency Range : 50/60Hz
- Rated Current : 13A MAX
- Approved Standard : SS246 (Singapore Approved Standard)
- Power : 3250 WATTS MAX



1USB & 1 Type-C Outlet



Direct 2-PIN Plug in

# BRITZ®

## Model: RCD 33 (ELCB Adaptor)

### Description

RCD 33 10mA adaptor for added protection against the risk of electric shock. It instantly cuts the power in the event of an earth connection leakage. It is latching, therefore power needs not to be reset at each use and it is ideal for home appliance spike protection .



### Active (Non-Latching) Type -

When power is cut to the device. The RCD will trip DO NO need to be RESET RCD Protection - Against the risk of fatal electric shocks

Adaptor - Simply plug in the tool or device you want to use  
40ms Trip Speed - To provide fast protection

### Operating instructions

STAGE 1 • Insert the RCD adaptor into a 13 amp mains socket and switch on.

STAGE 2 • Press the RESET button. The RED indicator should appear.

STAGE 3 • Press the TEST button. The RED indicator will disappear from the CLEAR window.


**• DO NOT USE IF THE RED INDICATOR REMAINS.**

STAGE 4 • Press the RESET button. The RCD has now been set for safe use provided the RED indicator shows in the CLEAR window.

Latching RCDs do trip during power cuts but they automatically reset once the power returns, so they are great for fridges, freezers, Refrigeration, Frost watchers, Aquariums, Chargers

### Technical Specification:

- Voltage Rating : AC240V 50Hz
- Current Rating : 13A
- Rated Tripping Current : 10mA
- Operating Speed : <40mS
- Environmental Protection : IP2x
- Type Tested to : BS 7071 - 1992  
BS 1363 - 1984

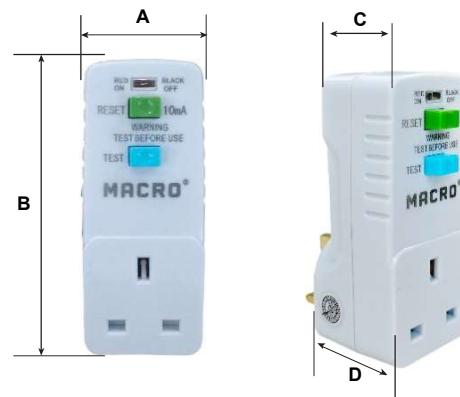

### Dimension

A: 44MM  
B: 110mm

C: 36MM  
D: 39mm

# BRITZ®



## Model: BR-253C

### Description

- AC Input Power : 230V - 250V
- USB Output Power : 12W
- Frequency Range : 50/60Hz
- Rated Current : 13A MAX
- Approved Standard : SS145 (Singapore Approved Standard)
- Power : 3250 WATTS MAX



1USB-A & 2 Type-C Outlet

# DC BRITZ®




Complies with  
IMDA Standards  
DA 102832



## Model: K616DC



### Description

- 32 Different Chimes
- Bright LED Flash Light
- Transmitter is IP44
- Anti-Interference System
- 150M Reachable Distance
- Receiver run on 3x AA Batteries

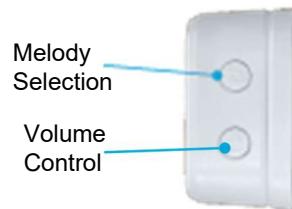


### Features


- Transmitter is IP44 (Waterproof & Weatherproof)
- Strong anti-interference and jamming system to prevent false triggering and interference.
- Wireless transmitter is capable of reaching the receiver at up to 150m distance.
- Wireless Kinetic Transmitter is Battery-Free.
- LED indicator is energy efficient with low power consumption.
- Ideal for homes, offices, factories, hospitals and guest rooms in hotel etc. It can also be used for message notifying, alarms for the patients and elderly people.

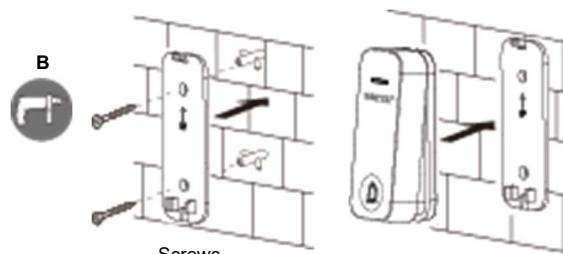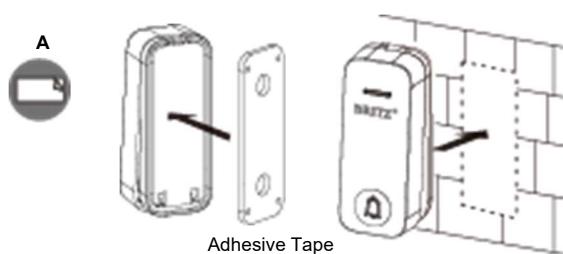

Kinetic Bell Push

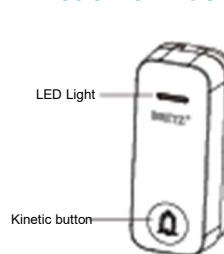


Receiver

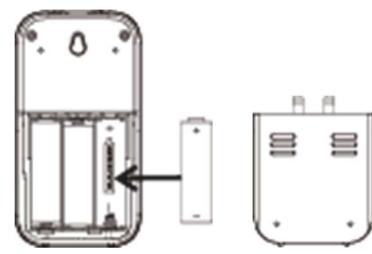

# AC BRITZ®



Complies with  
IMDA Standards  
DA 102832

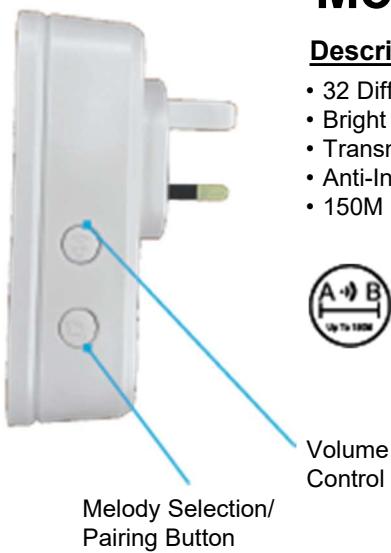

## Model: K636AC

### Description

- 32 Different Chimes
- Bright LED Flash Light
- Transmitter is IP44
- Anti-Interference System
- 150M Reachable Distance






Volume Control

Melody Selection/  
Pairing Button

### Features

- Easy to install with screw or adhesive tape.
- Strong anti-interference and jamming system to prevent false triggering and interference.
- Wireless remote control reaches 150m at straight distance and up to 50m with any obstacles during the course transmission.
- LED indicator low power consumption.
- Ideal for homes, offices, factories, hospitals and guest room in hotel etc. It can also be used for message notifying, alarms for the patients and elderly people.

### Kinetic Bell Push

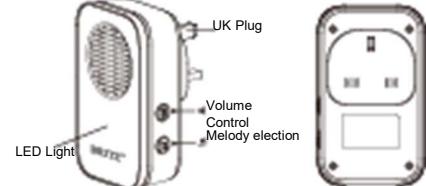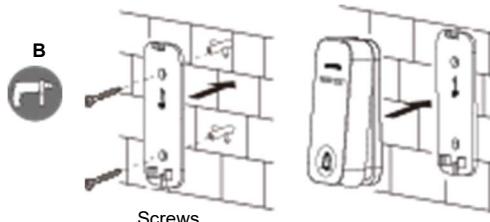

# AC BRITZ®



Complies with  
IMDA Standards  
DA 102832



Melody Selection/  
Pairing Button

Volume  
Control



## Model: K637AC



### Description

- 52 Different Chimes
- Bright LED Flash Light
- Transmitter is IP44
- Anti-Interference System
- 200M Reachable Distance

### Features

- Easy to install with adhesive tape.
- Strong anti-interference and jamming system to prevent false triggering and interference.
- Wireless remote control reaches up to 200m range.
- Kinetic transmitter (IP44) is waterproof and weatherproof.
- LED indicator consumes little power.
- Ideal for homes, offices, factories, hospitals and guest rooms in hotel etc. It can also be used for message notifying, alarms for the patients and elderly people.

### Kinetic Bell Push

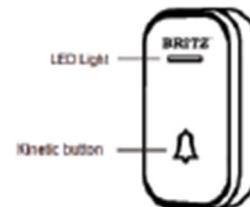


# AC BRITZ®



Complies with  
IMDA Standards  
DA 102832



UK3-PIN

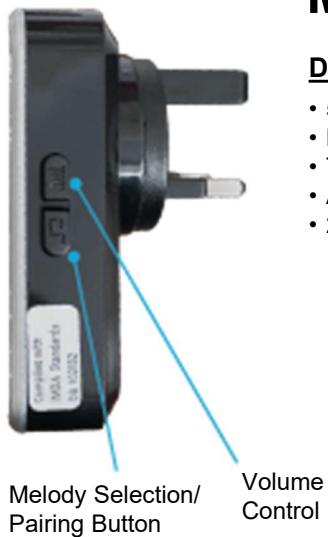

## Model: K638AC

### Description


- 52 Different Chimes
- Bright LED Flash Light
- Transmitter is IP44
- Anti-Interference System
- 200M Reachable Distance



### Features

- Easy to install with adhesive tape.
- Strong anti-interference and jamming system to prevent false triggering and interference.
- Wireless remote control reaches up to 200m range.
- Kinetic transmitter (IP44) is waterproof and weatherproof.
- LED indicator consumes little power.
- Ideal for homes, offices, factories, hospitals and guest rooms in hotel etc. It can also be used for message notifying, alarms for the patients and elderly people.

### Kinetic Bell Push

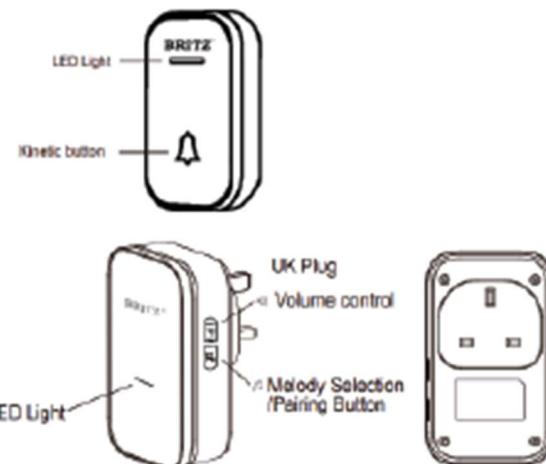

# AC BRITZ®



Complies with  
IMDA Standards  
DA 102832



## Model: K639AC

### Description

- 52 Different Chimes
- Bright LED Flash Light
- Transmitter is IP44
- Anti-Interference System
- 200M Reachable Distance



Contact-Lens      UK3-PIN

### Features

- Easy to install with adhesive tape and screws (included).
- Strong anti-interference and jamming system to prevent false triggering and interference.
- Wireless remote control reaches up to 200m range.
- Kinetic transmitter (IP44) is waterproof and weatherproof.
- LED indicator consumes little power.
- Ideal for homes, offices, factories, hospitals and guest rooms in hotel etc. It can also be used for message notifying, alarms for the patients and elderly people.

### How it works:




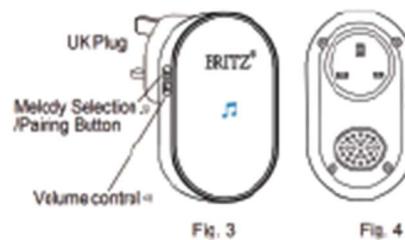


Fig. 3

Fig. 4

### Transmitter unit (Weatherproof IP44):

BRITZ Contactless Transmitter is USB powered (Charging Cable Included). A single full charge of 2 hours allows for 4 to 6 months of usage.

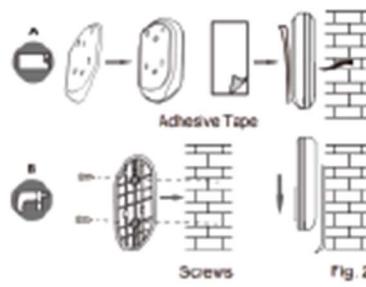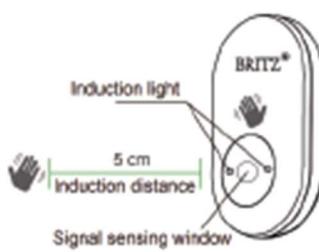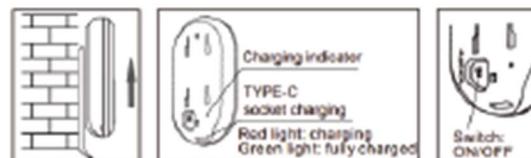

# DC

# BRITZ®

Complies with  
IMDA Standards  
DA 102832



## Model: 912DC


### Description

- 25 Different Chimes
- Bright LED Flash Light
- Transmitter is IP44
- Anti-Interference System
- 150M Reachable Distance
- Run on 3x AA Batteries



### Features


- Easy to install with screw or adhesive tape.
- Strong anti-interference and jamming system to prevent false triggering and interference.
- Wireless remote control reaches 1 00m at straight distance and up 50m with any obstacles during the course transmission.
- LED indicator low power consumption.
- Ideal for homes, offices, factories, hospitals, and guest room in hotel etc. It can also be used for message notifying, alarms for the patients and elderly people.

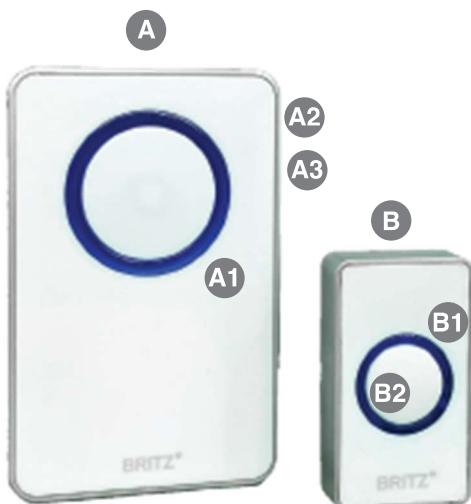

- A Receiver
- A1 LED flashing indicator
- A2 Music selection button
- A3 Volume selection button
- B Transmitter
- B1 LED indicator light
- B2 Push button

# AC BRITZ®

Complies with  
IMDA Standards  
DA 102832

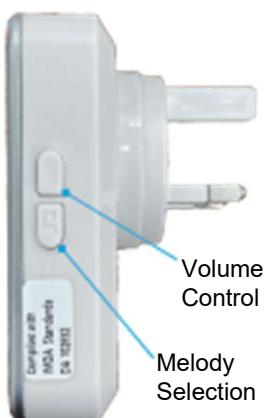

## Model: 665AC

### Description



- 45 Different Chimes
- Bright LED Flash Light
- Transmitter is IP44
- Anti-Interference System
- 200M Reachable Distance



### Features


- Strong anti-interference and jamming system to prevent false triggering and interference.
- Wireless remote control reaches up to 200m range.
- Kinetic transmitter (IP44) is waterproof and weatherproof.
- LED indicator consumes little power.
- Ideal for homes, offices, factories, hospitals and guest rooms in hotel etc. It can also be used for message notifying, alarms for the patients and elderly people.

### Transmitter unit (Weatherproof IP44)

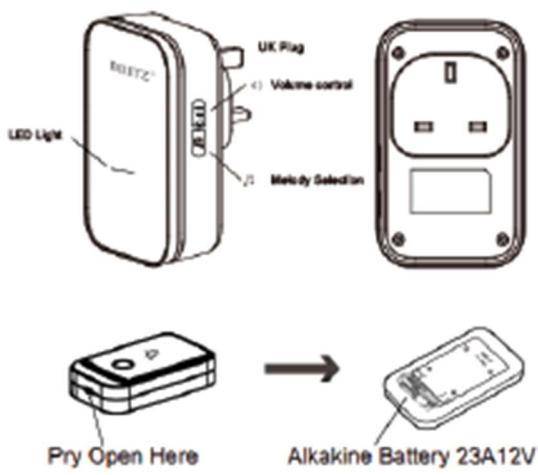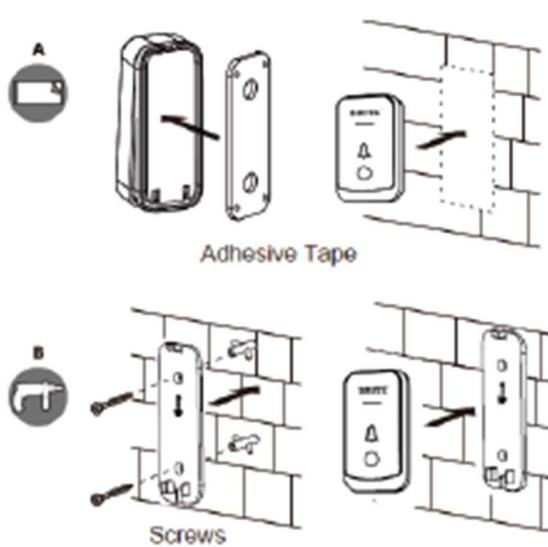

# AC BRITZ®

Complies with  
IMDA Standards  
DA 102832

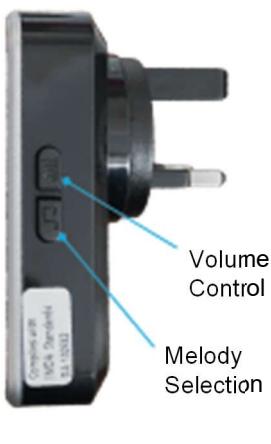

## Model: 667AC


### Description

- 45 Different Chimes
- Bright LED Flash Light
- Transmitter is IP44
- Anti-Interference System
- 200M Reachable Distance




### Features

- Strong anti-interference and jamming system to prevent false triggering and interference.
- Wireless remote control reaches up to 200m range.
- Kinetic transmitter (IP44) is waterproof and weatherproof.
- LED indicator consumes little power.
- Ideal for homes, offices, factories, hospitals and guest rooms in hotel etc. It can also be used for message notifying, alarms for the patients and elderly people.

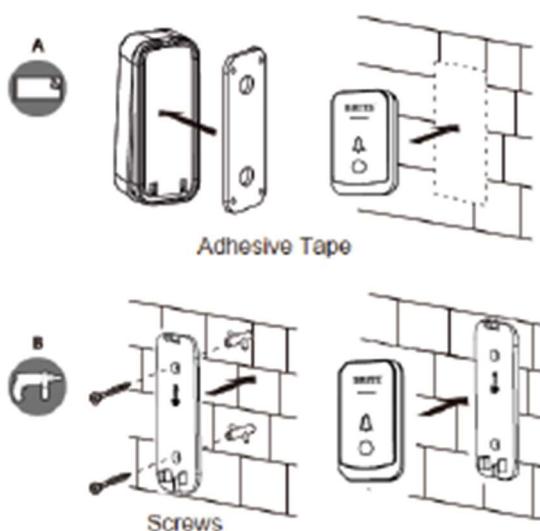

### Transmitter unit (Weatherproof IP44)

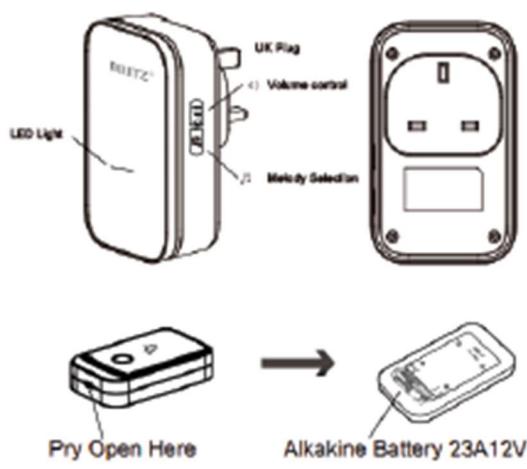

# DC BRITZ®



## Model: 024DC

### Description

- 3 Different Chimes
- 3x AAA Batteries



\*Able to mount on  
1Gang Box

\*\*Box not Included



## Model: 207DC

### Description

- Striking Mechanical Chime
- 4x C Size Batteries
- Include 1 Transmitter
- Stripe Design



## Model: 208DC

### Description

- Striking Mechanical Chime
- 4x C Size Batteries
- Include 1 Transmitter
- Cube Design


# DC BRITZ®



## Model: L128AC

### Description

- Mechanical striking chime
- Live wire 230V power

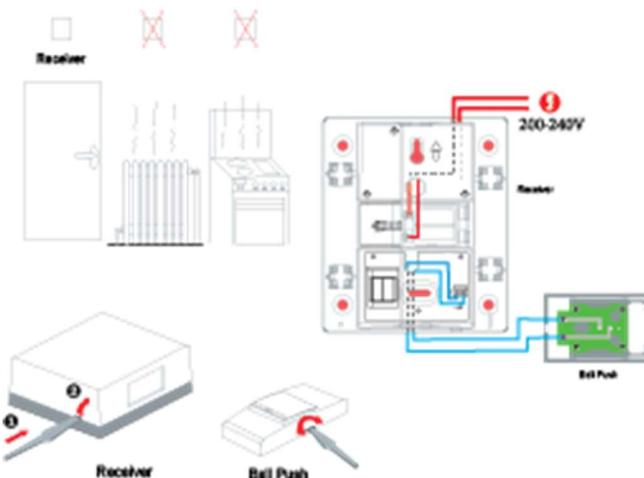

## Model: D130DC


### Description

- Electronic melody chime
- 3x AA Batteries

# AC BRITZ®



Complies with  
IMDA Standards  
DA 102832

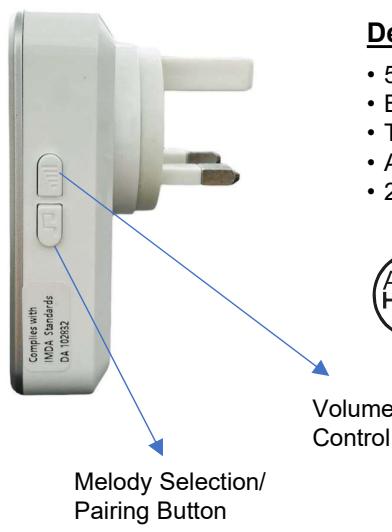

## Model: K635AC

### Description



- 52 Different Chimes
- Bright LED Flash Light
- Transmitter is IP44
- Anti-Interference System
- 200M Reachable Distance



### Features

- Easy to install with adhesive tape.
- Strong anti-interference and jamming system to prevent false triggering and interference.
- Wireless remote control reaches up to 200m range.
- Kinetic transmitter (IP44) is waterproof and weatherproof.
- LED indicator consumes little power.
- Ideal for homes, offices, factories, hospitals and guest rooms in hotel etc. It can also be used for message notifying, alarms for the patients and elderly people.

### Kinetic Bell Push

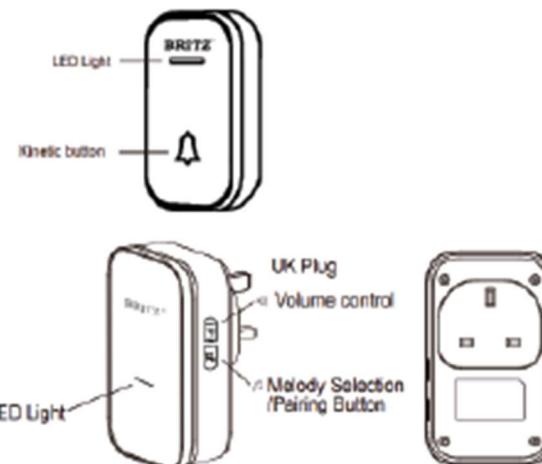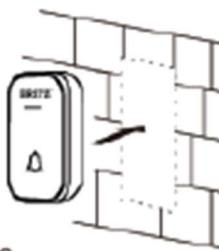

# AC BRITZ®



Complies with  
IMDA Standards  
DA 102832



UK3-PIN



## Model: K633AC

### Description


- 52 Different Chimes
- Bright LED Flash Light
- Transmitter is IP44
- Anti-Interference System
- 200M Reachable Distance



### Features

- Easy to install with adhesive tape.
- Strong anti-interference and jamming system to prevent false triggering and interference.
- Wireless remote control reaches up to 200m range.
- Kinetic transmitter (IP44) is waterproof and weatherproof.
- LED indicator consumes little power.
- Ideal for homes, offices, factories, hospitals and guest rooms in hotel etc. It can also be used for message notifying, alarms for the patients and elderly people.

### Kinetic Bell Push

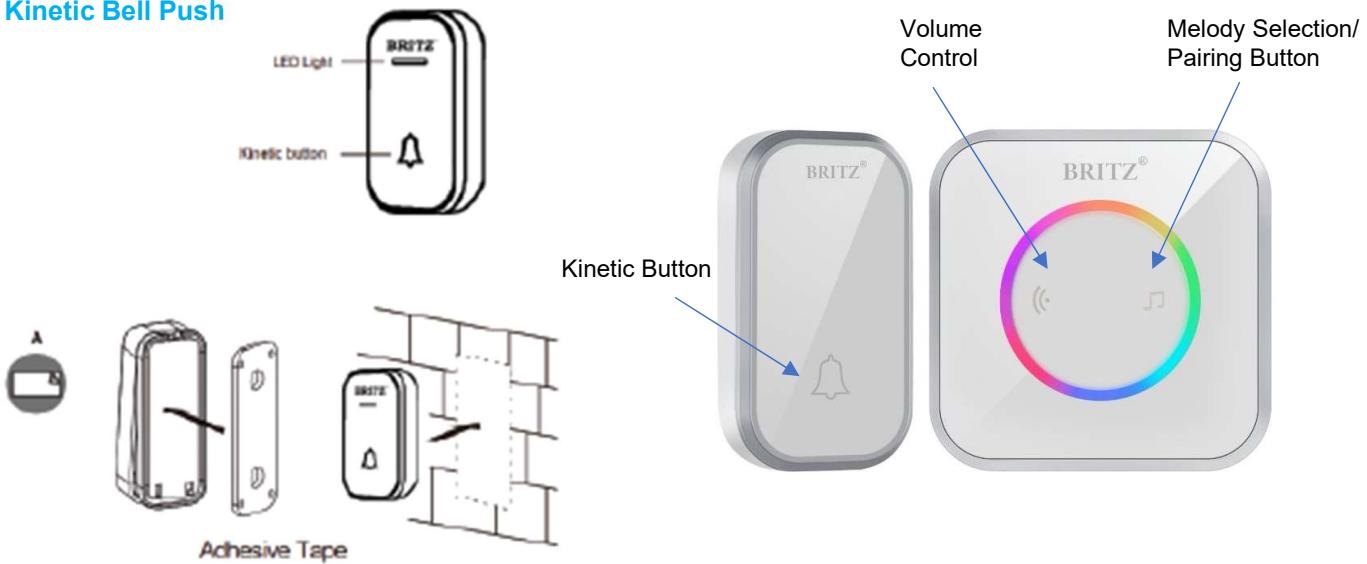

# AC BRITZ®



Complies with  
IMDA Standards  
DA 102832



UK3-PIN



## Model: K634AC

### Description


- 52 Different Chimes
- Bright LED Flash Light
- Transmitter is IP44
- Anti-Interference System
- 200M Reachable Distance



### Features

- Easy to install with adhesive tape.
- Strong anti-interference and jamming system to prevent false triggering and interference.
- Wireless remote control reaches up to 200m range.
- Kinetic transmitter (IP44) is waterproof and weatherproof.
- LED indicator consumes little power.
- Ideal for homes, offices, factories, hospitals and guest rooms in hotel etc. It can also be used for message notifying, alarms for the patients and elderly people.

### Kinetic Bell Push

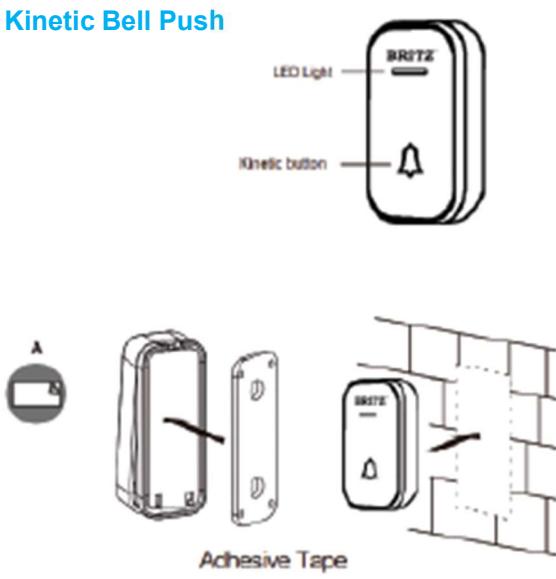

# DT<sup>®</sup> ENGLAND

## Description

- Overheating Reset Button
- Smart Power Indicator Fireproof Material
- Ergonomic Handle Grip



## Technical Specification:

- |                   |                                 |
|-------------------|---------------------------------|
| • Voltage         | : 250, 50/60Hz                  |
| • Max load        | : 13 Amp                        |
| • Max rate        | : 1250W or 3000W Fully Unwound  |
| • Cable Rating    | : 3 Cores x 1.25mm <sup>2</sup> |
| • Wire Length     | : 6M & 10M                      |
| • Safety Standard | : SS307, BS 1363/A              |



Model:  
DT 9800(1 G6M)



Model:  
DT 9800(1G10M)



Model:  
DT 9800(2G6M)



Model:  
DT 9800(2G10M)

# BRITZ®

CE




## Specification

- Number Of Outlets : 4 x 13A 8S1363
- Plug Type : BS1363A/ A13A
- Thermal Cut Off Protection Reset : Yes
- Cable Type : 1.25mm, 3 Core I H05-VVF 8S6500
- Cable Length : 30Metres / 50Metres
- Max Load Wound : 720W
- Max Load Unwound : 3120W
- Complies To All Relevant British Standard CE

## Features

- Impact resistant outer shell with internal reel
- Flush & recessed power inlet sockets
- Durable steel frame
- Easy wind motion
- Thermal cut off protection
- Reel stopper at the back of reel

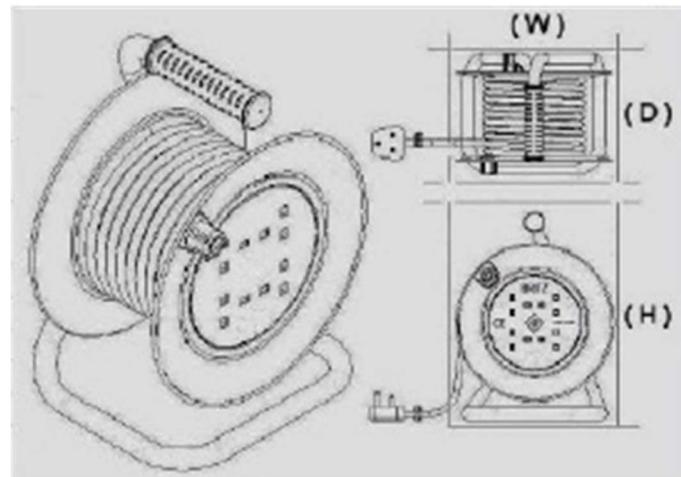

## Dimension:

**BRITZ 30Meter** 270X345x195mm  
(W x H x D) - WEIGHT: 6. 10kg

**BRITZ 50Meter** 270X345x195mm  
(W x H x D) - WEIGHT: 4. 10kg

**Available 30M & 50M**

# BRITZ®



Fire Retardant  
Material



100% OFC  
Copper Cable




Neon Large Indicator  
With 2 Pin Friendly  
Safety Shutter

### Recommended Connection For:

- Home electronic, audio, video sets
- Office equipments
- Computer, peripherals
- Power hand tools, etc.

### Technical Specification:

- Rated Voltage : 240 Volts
- Rated Current : 13 Amperes max
- Power : 3240 Watts max
- Power Indicator : Neon
- PSO Standard : SS145, BS1363
- Plug Used : Fuse Plug, SS145, BS1363
- Fuse Used : 13A, SS167, BS1362
- Cable Rating : 1.25mm<sup>2</sup>, 3 Cores PVC cable

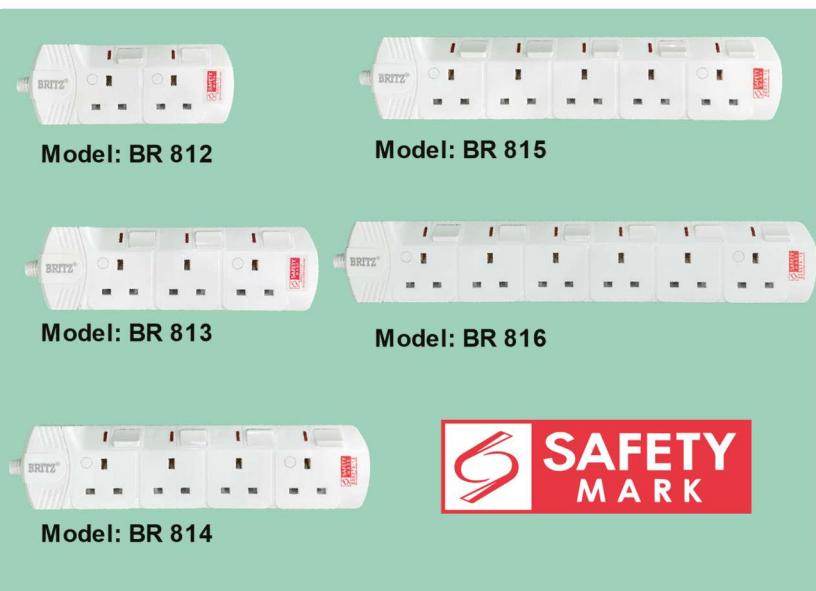

**Available in  
2M Only**



Complimentary Plug  
Key

Strong moulded cable  
gland to prevent cable  
break off

# BRITZ®



Fire Retardant Material



100% OFC Copper Cable



Neon Large Indicator With 2 Pin Friendly Safety Shutter

### Recommended Connection For:

- Home electronic, audio, video sets
- Office equipments
- Computer, peripherals
- Power hand tools, etc.

### Technical Specification:

- |                   |   |
|-------------------|---|
| • Rated Voltage   | : 240 Volts                               |
| • Rated Current   | : 13 Amperes max                          |
| • Power           | : 3240 Watts max                          |
| • Power Indicator | : Neon                                    |
| • PSO Standard    | : SS145, BS1363                           |
| • Plug Used       | : Fuse Plug, SS145, BS1363                |
| • Fuse Used       | : 13A, SS167, BS1362                      |
| • Cable Rating    | : 1.25mm <sup>2</sup> , 3 Cores PVC cable |



**Available in  
2M Only**



Complimentary Plug Key



Strong moulded cable gland to prevent cable break off

# BRITZ®



Fire Retardant  
Material



100% OFC  
Copper Cable



Neon Large Indicator  
With 2 Pin Friendly  
Safety Shutter




SURGE  
PROTECTION

### Recommended Connection For:

- Home electronic, audio, video sets
- Office equipments
- Computer, peripherals
- Power hand tools, etc.

### Technical Specification:

- Rated Voltage : 240 Volts
- Rated Current : 13 Amperes max
- Power : 3240 Watts max
- Power Indicator : Neon
- PSO Standard : SS145, BS1363
- Plug Used : Fuse Plug, SS145, BS1363
- Fuse Used : 13A, SS167, BS1362
- Cable Rating : 1.25mm<sup>2</sup>, 3 Cores PVC cable

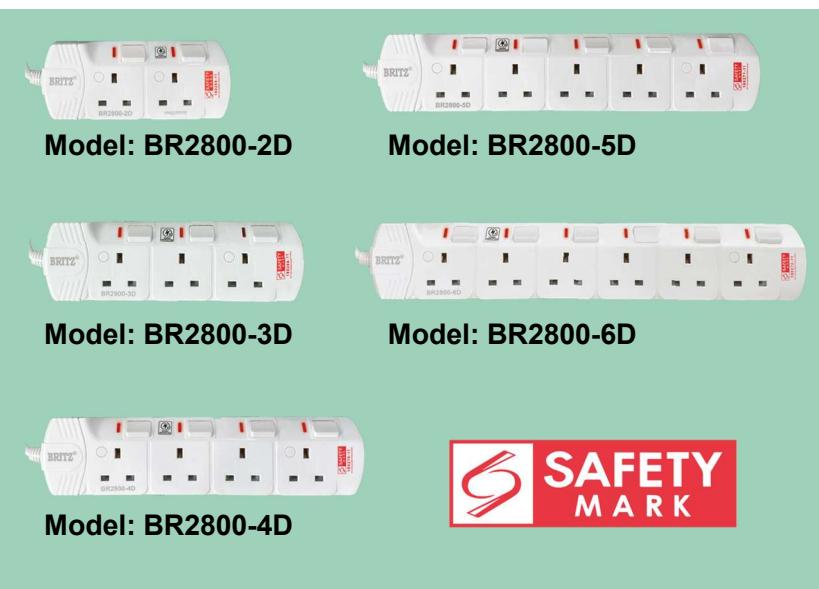

Available in  
3M & 6M



Complimentary Plug  
Key



Strong moulded cable  
gland to prevent cable  
break off

# BRITZ®



Fire Retardant Material



100% OFC Copper Cable





Neon Large Indicator With 2 Pin Friendly Safety Shutter



**SURGE PROTECTION**

#### Recommended Connection For:

- Home electronic, audio, video sets
- Office equipments
- Computer, peripherals
- Power hand tools, etc.

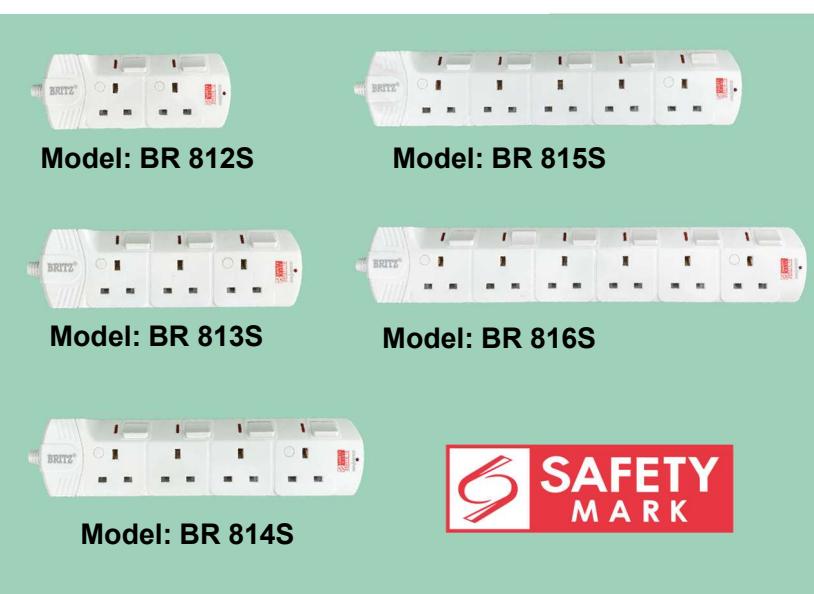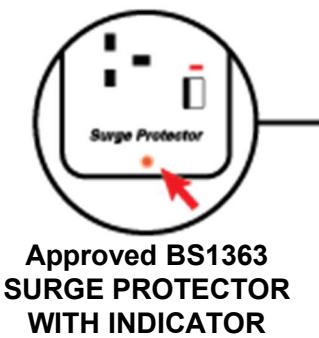

**Available in  
3M Only**



Direct 2-Pin Plug in



Strong moulded cable gland to prevent cable break off

# BRITZ®



Fire Retardant Material



100% OFC Copper Cable




Neon Large Indicator With 2 Pin Friendly Safety Shutter



**SURGE PROTECTION**

### Recommended Connection For:

- Home electronic, audio, video sets
- Office equipments
- Computer, peripherals
- Power hand tools, etc.

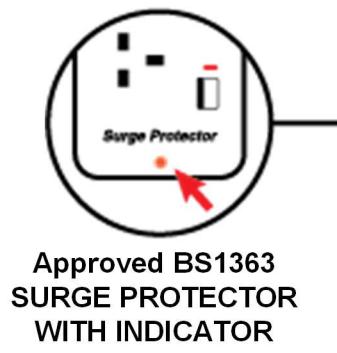

Approved BS1363 SURGE PROTECTOR WITH INDICATOR



Model: BR 812SBK



Model: BR 815SBK



Model: BR 813SBK



Model: BR 816SBK



Model: BR 814SBK



**Available in  
3M Only**



Direct 2-Pin Plug in



Strong moulded cable gland to prevent cable break off

# DT<sup>®</sup> ENGLAND



Fire Retardant Material



100% OFC Copper Cable



Coloured Switches With LED Indicator



**SURGE PROTECTION**

### Recommended Connection For:

- Home electronic, audio, video sets
- Office equipments
- Computer, peripherals
- Power hand tools, etc.

### Technical Specification:

- |                   |   |
|-------------------|---|
| • Rated Voltage   | : 240 Volts                               |
| • Rated Current   | : 13 Amperes max                          |
| • Power           | : 3240 Watts max                          |
| • Power Indicator | : Neon                                    |
| • PSO Standard    | : SS145, BS1363                           |
| • Plug Used       | : Fuse Plug, SS145, BS1363                |
| • Fuse Used       | : 13A, SS167, BS1362                      |
| • Cable Rating    | : 1.25mm <sup>2</sup> , 3 Cores PVC cable |

Approved BS1363 SURGE PROTECTOR WITH INDICATOR



**Available in  
3M & 6M**



Direct 2-Pin Plug in



Strong moulded cable gland to prevent cable break off

# DT<sup>®</sup> ENGLAND

# 2 USB



Fire Retardant Material



100% OFC Copper Cable



Coloured Switches With LED Indicator




**SURGE PROTECTION**



#### Recommended Connection For:

- Home electronic, audio, video sets
- Office equipments
- Computer, peripherals
- Power hand tools, etc.

#### 2x USB Charger (2.1A)

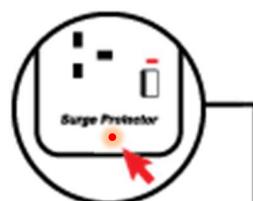

Approved BS1363  
**SURGE PROTECTOR  
WITH INDICATOR**



#### Technical Specification:

- |                   |   |
|-------------------|---|
| • Rated Voltage   | : 240 Volts                               |
| • Rated Current   | : 13 Amperes max                          |
| • Power           | : 3240 Watts max                          |
| • Power Indicator | : Neon                                    |
| • PSO Standard    | : SS145, BS1363                           |
| • Plug Used       | : Fuse Plug, SS145, BS1363                |
| • Fuse Used       | : 13A, SS167, BS1362                      |
| • Cable Rating    | : 1.25mm <sup>2</sup> , 3 Cores PVC cable |



Model: DT 862UI



Model: DT 865UI



Model: DT 863UI



Model: DT 866UI



Model: DT 864UI



**Available in  
3M & 6M**



Direct 2-Pin Plug in



Strong moulded cable gland to prevent cable break off

# DT<sup>®</sup> ENGLAND

# 3 USB



**Fire Retardant Material**



**100% OFC Copper Cable**



**Neon Large Indicator With 2 Pin Friendly Safety Shutter**



**SURGE PROTECTION**



**2x USB & 1 TYPE C Port**



**Approved BS1363 SURGE PROTECTOR WITH INDICATOR**




### Recommended Connection For:

- Home electronic, audio, video sets
- Office equipments
- Computer, peripherals
- Power hand tools, etc.

### Technical Specification:

- |                   |   |
|-------------------|---|
| • Rated Voltage   | : 240 Volts                               |
| • Rated Current   | : 13 Amperes max                          |
| • Power           | : 3240 Watts max                          |
| • Power Indicator | : Neon                                    |
| • PSO Standard    | : SS145, BS1363                           |
| • Plug Used       | : Fuse Plug, SS145, BS1363                |
| • Fuse Used       | : 13A, SS167, BS1362                      |
| • Cable Rating    | : 1.25mm <sup>2</sup> , 3 Cores PVC cable |

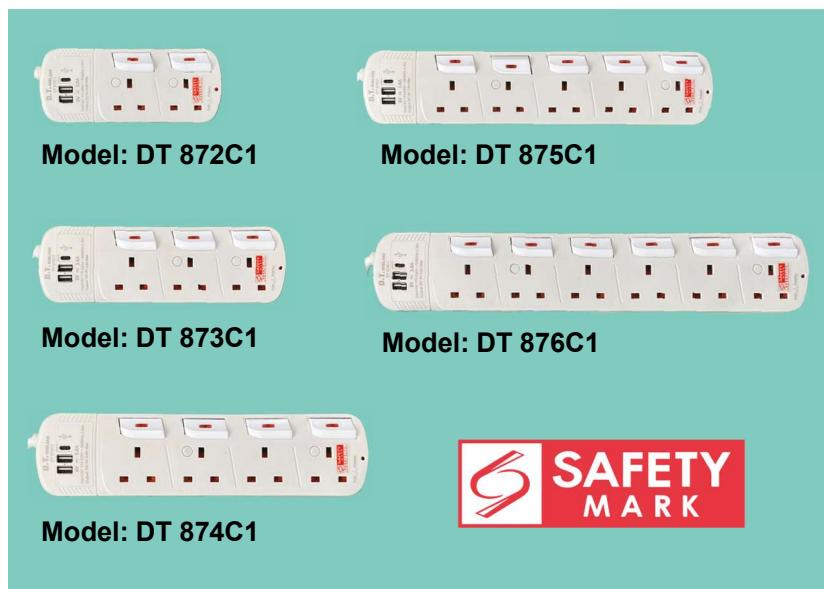

**Available in 3M Only**



**Complimentary Plug Key**



**Strong moulded cable gland to prevent cable break off**



# DT<sup>®</sup> ENGLAND



**Fire Retardant Material**



**100% OFC Copper Cable**



**Neon Large Indicator With 2 Pin Friendly Safety Shutter**



**SURGE PROTECTION**



**2x USB & 1 TYPE C Port**

#### Recommended Connection For:

- Home electronic, audio, video sets
- Office equipments
- Computer, peripherals
- Power hand tools, etc.

#### Technical Specification:

- |                   |   |
|-------------------|---|
| • Rated Voltage   | : 240 Volts                               |
| • Rated Current   | : 13 Amperes max                          |
| • Power           | : 3240 Watts max                          |
| • Power Indicator | : Neon                                    |
| • PSO Standard    | : SS145, BS1363                           |
| • Plug Used       | : Fuse Plug, SS145, BS1363                |
| • Fuse Used       | : 13A, SS167, BS1362                      |
| • Cable Rating    | : 1.25mm <sup>2</sup> , 3 Cores PVC cable |

**Approved BS1363 SURGE PROTECTOR WITH INDICATOR**



Model: DT 872C1



Model: DT 875C1



Model: DT 873C1



Model: DT 876C1



Model: DT 874C1



# 3 USB




**Available in 3M Only**



Complimentary Plug Key



Strong moulded cable gland to prevent cable break off

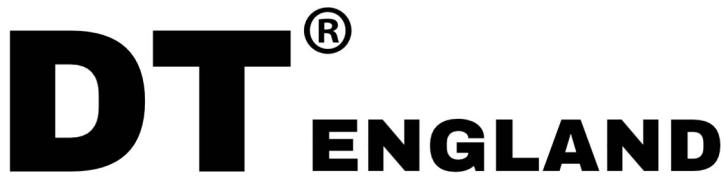

# 4 USB



Fire Retardant  
Material



100% OFC  
Copper Cable



Neon Large Indicator  
With 2 Pin Friendly  
Safety Shutter



4x USB  
Charger (4.2A)



Approved BS1363  
SURGE PROTECTOR  
WITH INDICATOR




## Recommended Connection For:

- Home electronic, audio, video sets
- Office equipments
- Computer, peripherals
- Power hand tools, etc.

## Technical Specification:

• Rated Voltage	: 240 Volts
• Rated Current	: 13 Amperes max
• Power	: 3240 Watts max
• Power Indicator	: Neon
• PSO Standard	: SS145, BS1363
• Plug Used	: Fuse Plug, SS145, BS1363
• Fuse Used	: 13A, SS167, BS1362
• Cable Rating	: 1.25mm <sup>2</sup> , 3 Cores PVC cable

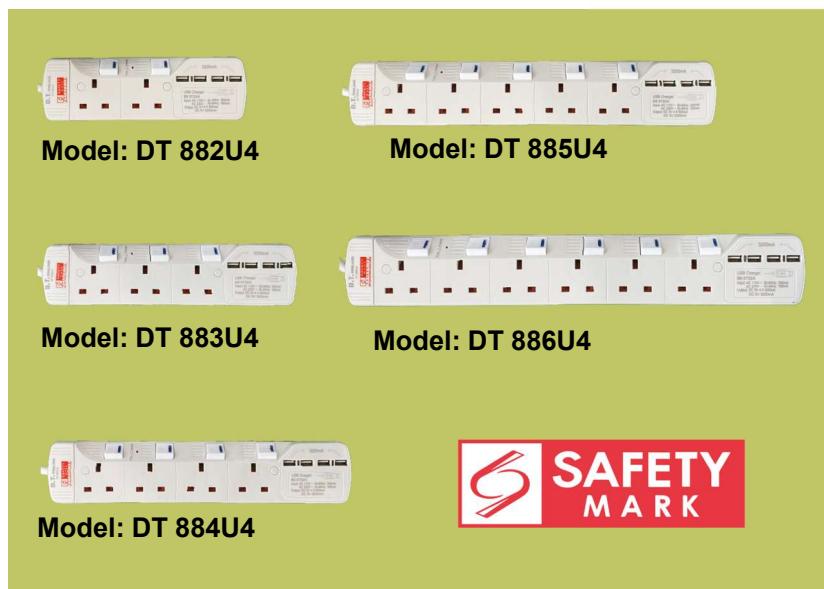

Available in  
3M & 6M



Direct 2-Pin Plug in



Strong moulded cable  
gland to prevent cable  
break off



# 4 USB



Fire Retardant Material



100% OFC Copper Cable



Neon Large Indicator With 2 Pin Friendly Safety Shutter



- Recommended Connection For:**
- Home electronic, audio, video sets
  - Office equipments
  - Computer, peripherals
  - Power hand tools, etc.
- 3x USB & 1 TYPE C Port  
 • USB Timer Function. Automatically Turn Off After 3 Hour /6 Hour

#### Technical Specification:

- Rated Voltage : 240 Volts
- Rated Current : 13 Amperes max
- Power : 3240 Watts max
- Power Indicator : Neon
- PSO Standard : SS145, BS1363
- Plug Used : Fuse Plug, SS145, BS1363
- Fuse Used : 13A, SS167, BS1362
- Cable Rating : 1.25mm<sup>2</sup>, 3 Cores PVC cable




Available in  
3M Only



Complimentary Plug Key



Strong moulded cable gland to prevent cable break off

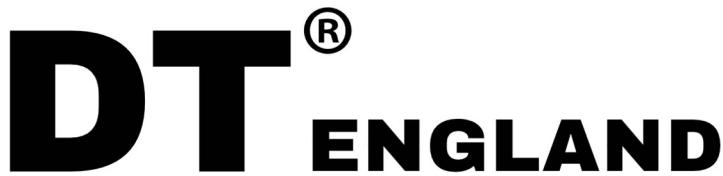

# 4 USB



Fire Retardant Material



100% OFC Copper Cable



Neon Large Indicator With 2 Pin Friendly Safety Shutter



- 3x USB & 1 TYPE C Port
- USB Timer Function. Automatically Turn Off After 3 Hour /6 Hour

### Recommended Connection For:

- Home electronic, audio, video sets
- Office equipments
- Computer, peripherals
- Power hand tools, etc.

### Technical Specification:

- |                   |   |
|-------------------|---|
| • Rated Voltage   | : 240 Volts                               |
| • Rated Current   | : 13 Amperes max                          |
| • Power           | : 3240 Watts max                          |
| • Power Indicator | : Neon                                    |
| • PSO Standard    | : SS145, BS1363                           |
| • Plug Used       | : Fuse Plug, SS145, BS1363                |
| • Fuse Used       | : 13A, SS167, BS1362                      |
| • Cable Rating    | : 1.25mm <sup>2</sup> , 3 Cores PVC cable |



Available in  
**3M & 6M**



Complimentary Plug Key



Strong moulded cable gland to prevent cable break off



# MACRO



Fire Retardant Material



Universal  
Socket Outlet



Neon Large Indicator  
With 2 Pin Friendly  
Safety Shutter



**SURGE  
PROTECTION**



### Recommended Connection For:

- Home electronic, audio, video sets
- Office equipments
- Computer, peripherals
- Power hand tools, etc.

### Technical Specification:

- |                   |   |
|-------------------|---|
| • Rated Voltage   | : 240 Volts                               |
| • Rated Current   | : 13 Amperes max                          |
| • Power           | : 3240 Watts max                          |
| • Power Indicator | : Neon                                    |
| • PSO Standard    | : SS145, BS1363                           |
| • Plug Used       | : Fuse Plug, SS145, BS1363                |
| • Fuse Used       | : 13A, SS167, BS1362                      |
| • Cable Rating    | : 1.25mm <sup>2</sup> , 3 Cores PVC cable |



Model: MA8864 WN

Model: MA8866 WN



Model: MA8865 WN

**Available in  
3M Only**



Direct 2-Pin Plug in



Strong moulded cable  
gland to prevent cable  
break off

# MACRO<sup>®</sup> 4 USB




**Fire Retardant Material**



**100% OFC Copper Cable**



**SURGE PROTECTION**

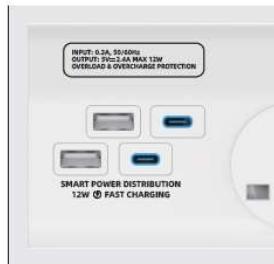

**2x USB & 2 TYPE C Port**



**PLUG APPROVED WITH SAFETY MARK**

#### Recommended Connection For:

- Home electronic, audio, video sets
- Office equipments
- Computer, peripherals
- Power hand tools, etc.

#### Technical Specification:

- |                   |   |
|-------------------|---|
| • Rated Voltage   | : 240 Volts                               |
| • Rated Current   | : 13 Amperes max                          |
| • Power           | : 2900 Watts max                          |
| • Power Indicator | : Neon                                    |
| • Plug Used       | : Fuse Plug, SS145, BS1363                |
| • Fuse Used       | : 13A, SS167, BS1362                      |
| • Cable Rating    | : 1.25mm <sup>2</sup> , 3 Cores PVC cable |



Model: MA-WN94U4




Model: MA-WN94U4(BK)



**Available in 3M Only**



**Strong moulded cable gland to prevent cable break off**

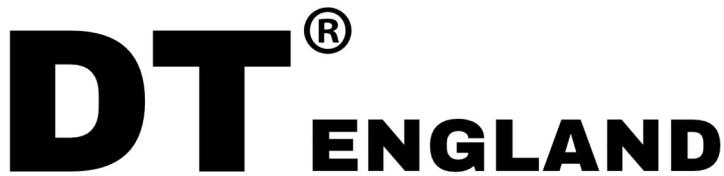

# 4 USB



Fire Retardant Material



100% OFC Copper Cable



Neon Large Indicator With 2 Pin Friendly Safety Shutter




### Recommended Connection For:

- Home electronic, audio, video sets
  - Office equipments
  - Computer, peripherals
  - Power hand tools, etc.
- 1x USB & 3 TYPE C Port  
 • USB Timer Function  
 Automatically Turn Off After  
 3 Hour / 6 Hour

### Technical Specification:

- Rated Voltage : 240 Volts
- Rated Current : 13 Amperes max
- Power : 3240 Watts max
- USB Power : 25W 5A Fast Charging
- Power Indicator : Neon
- PSO Standard : SS145, BS1363
- Plug Used : Fuse Plug, SS145, BS1363
- Fuse Used : 13A, SS167, BS1362
- Cable Rating : 1.25mm<sup>2</sup>, 3 Cores PVC cable

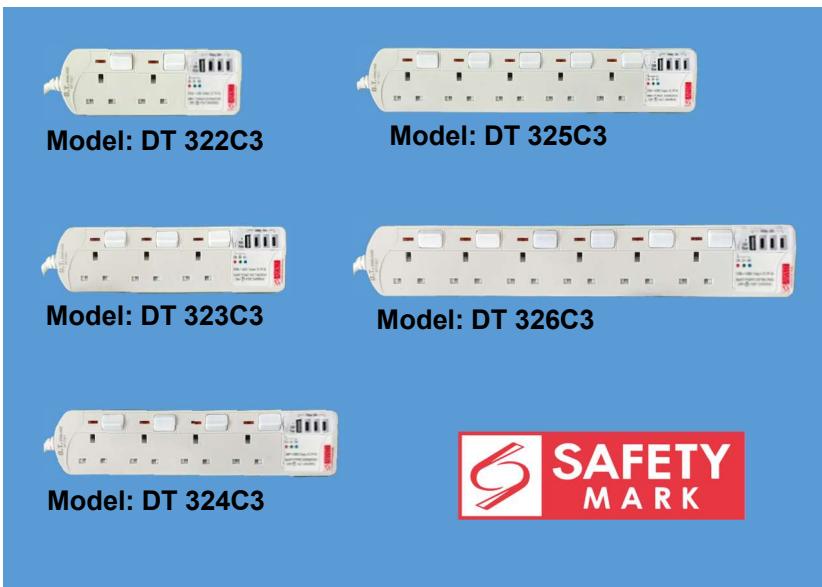

Available in  
3M Only



Complimentary Plug Key



Strong moulded cable gland to prevent cable break off

# BRITZ®

## Model: 22W / 32W / 40W FLUORESCENT


- Daylight (6500K)
- Extra Bright
- Low Heat Dissipation
- Long Lifespan
- Tri-Phosphorus Coating (Bright & Lasting)




### ENERGY EFFICIENCY



**A**



EXTRA  
BRIGHT



LONG  
LASTING



# BRITZ®



19CM



23CM

**Model: BR-CL01**  
(18W/DL)

**Model: BR-CL02**  
(26W/DL)



27CM



32CM

**Model: BR-CLOS**  
(36W/TRI)

**Model: BR-CLOS**  
(60W/TRI)



27CM



32CM

**Model: BR-CLOS**  
(36W/TRI)

**Model: BR-CLOS**  
(GOW/TRI)

## Description

- No extra external AC-DC driver needed; Low-heat radiation, high-end solution for ceiling lights.
- Special circuit design can resist lightning strikes, and is safe to use during thunderstorms.
- LED light module has better performance in heat dissipation, which allows delivers longer life than other LED module.
- Super bright and low-power dissipation, at least 90% energy saving.

## Features

- Energy Saving
- 360 Degrees Beam Angle High Brightness(100Lm/W)
- Extra Thick Magnet, Strong Absorption, Do Not Obstruct Wire
- Anti Flicker & True Colour
- Easy To Install, Wide Application

### ENERGY EFFICIENCY



EXTRA BRIGHT



1CM



LONG LASTING



# BRITZ®



19CM



23CM

**Model: BR-CL01**  
(18W/DL)

**Model: BR-CL02**  
(26W/DL)



27CM



32CM

**Model: BR-CLOS**  
(36W/TRI)

**Model: BR-CLOS**  
(60W/TRI)



27CM



32CM

**Model: BR-CLOS**  
(36W/TRI)

**Model: BR-CLOS**  
(GOW/TRI)


## Description

- No extra external AC-DC driver needed; Low-heat radiation, high-end solution for ceiling lights.
- Special circuit design can resist lightning strikes, and is safe to use during thunderstorms.
- LED light module has better performance in heat dissipation, which allows delivers longer life than other LED module.
- Super bright and low-power dissipation, at least 90% energy saving.

## Features

- Energy Saving
- 360 Degrees Beam Angle High Brightness(100Lm/W)
- Extra Thick Magnet, Strong Absorption, Do Not Obstruct Wire
- Anti Flicker & True Colour
- Easy To Install, Wide Application

### ENERGY EFFICIENCY

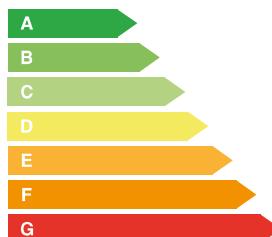

EXTRA BRIGHT



1CM



LONG LASTING



# BRITZ®



DIAMETER : 23CM

Model: BR-CM1  
(36W/DL)

DIAMETER : 27CM

Model: BR-CM1  
(48W/DL)

DIAMETER : 17CM

Model: BR-CMX2L  
(24W/DL)

DIAMETER : 21CM

Model: BR-CMX2L  
(36W/DL)

DIAMETER : 24CM

Model: BR-CMX2L  
(48W/DL)

DIAMETER : 29CM

Model: BR-CMX2L  
(72W/DL)

## Description

- No extra external AC-DC driver needed; Low-heat radiation, high-end solution for ceiling lights.
- Special circuit design can resist lightning strikes, and is safe to use during thunderstorms.
- LED light module has better performance in heat dissipation, which allows delivers longer life than other LED module.
- Super bright and low-power dissipation, at least 90% energy saving.


## Features

- Energy Saving
- 360 Degrees Beam Angle High Brightness(100Lm/W)
- Extra Thick Magnet, Strong Absorption, Do Not Obstruct Wire
- Anti Flicker & True Colour
- Easy To Install, Wide Application

### ENERGY EFFICIENCY



EXTRA BRIGHT

1.5CM  
THICK MAGNET

LONG LASTING



# BRITZ®



DIAMETER : 23CM

Model: BR-CM1  
(36W/DL)

DIAMETER : 27CM

Model: BR-CM1  
(48W/DL)

DIAMETER : 17CM

Model: BR-CMX2L  
(24W/DL)

DIAMETER : 21CM

Model: BR-CMX2L  
(36W/DL)

DIAMETER : 24CM

Model: BR-CMX2L  
(48W/DL)

DIAMETER : 29CM

Model: BR-CMX2L  
(72W/DL)

## Description

- No extra external AC-DC driver needed; Low-heat radiation, high-end solution for ceiling lights.
- Special circuit design can resist lightning strikes, and is safe to use during thunderstorms.
- LED light module has better performance in heat dissipation, which allows delivers longer life than other LED module.
- Super bright and low-power dissipation, at least 90% energy saving.

## Features

- Energy Saving
- 360 Degrees Beam Angle High Brightness(100Lm/W)
- Extra Thick Magnet, Strong Absorption, Do Not Obstruct Wire
- Anti Flicker & True Colour
- Easy To Install, Wide Application

**Climate Vouchers**



# BRITZ®

## Model: EX-26



- Light source : 10w LED
- Nominal Efficacy : 500 Lumen
- Colour Temperature: 6500K
- IP Rating : IP44
- LED Chip : COB Super Bright Chip
- Input Voltage : SV 1A
- Battery Type : Lithium Battery (4000mA)
- Rechargeable Time : 6 hours Charging Time
- Run Time : 8 hours Working Time
- Light Output : High-Low-Strobe
- Charging : (Indicator Only Appears When Charging)



Charging Cable



Blister Packing



Strong Hook



Screw Hanging



Strong Holder



Strong Magnetic

## Dimension



## Usage



Equipment Maintenance



Construction Work



Backpacking



Fishing



Camping



Barbecue



Cycle Charge



Dirtproof Sandproof



Shock Proof



Energy Saving



Power Bank

# BRITZ®



ON Constantly on



OFF Off the light directly




AUTO Auto on when motion is sensed and off after 60 seconds of inactivity

## Model: BR-NL101

### Automatic Darkness Sensor


- Power : 0.5WMAX
- Voltage : 220V- 240V
- Brightness : 3 Stage Dimmable
- Colour Temperature : 2700k Warm White
- Sensor : Dusk To Dawn Sensor
- Lumen : 10lm
- Dimensions : 51 x 45 x 80mm

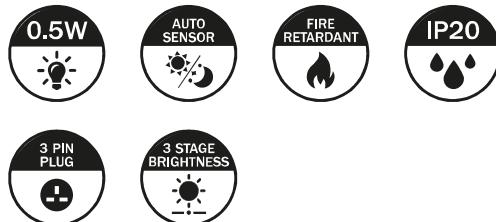

## Model: BR-NL 102M

### Automatic Motion Sensor

- Power : 0.5WMAX
- Voltage : 220V - 240V
- Brightness : 5 Stage Dimmable
- Mode : 3 Modes
- (Auto, Constant On, Off)
- Colour Temperature : 2700k Warm White
- Sensor : Motion Sensor
- Sensor Delay Time : 60 Seconds
- Sensor Angle : 120°
- Lumen : 20lm
- Dimensions : 70 x 52 x 92mm

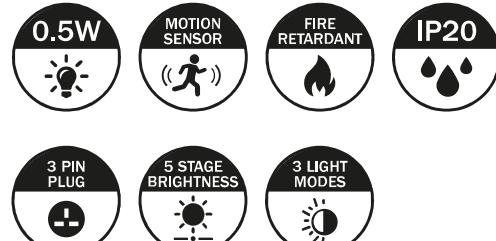

# BRITZ®



## Model: BR-NL104

### Automatic Darkness Sensor

- Power : 1W MAX
- Voltage : 220V- 240V
- Brightness : 3 Stage Dimmable
- Colour Temperature : 2700k Warm White
- Sensor : Dusk To Dawn Sensor
- Lumen : 10lm
- Dimensions : 13 x 5.6 x 5.4CM



## Model: BR-NL105RGB

### Automatic Darkness Sensor

- Power : 1W MAX
- Voltage : 220V - 240V
- Brightness : 1 Brightness
- Mode : 2 Modes
- Colour Temperature : Choose From 7 Colours
- Sensor : Light Sensor
- Lumen : 10Lm
- Dimensions : 13 x 5.6 x 5.4CM



# BRITZ®



## EASY TO INSTALL

Magnetic installation, ready to use



## Model: BR-NL103

### Automatic Darkness Sensor

- Power : 1W MAX
- Voltage : 220V- 240V
- Brightness : Dimmable
- Colour Temperature : 2700k Warm White
- Sensor : Dusk To Dawn Sensor
- Lumen : 10lm
- Dimensions : 8.5 x 4.7 x 9.1CM



## Model: BR-NL106M

### Automatic Motion Sensor

- Power : 0.5W MAX
- Voltage : 3x AAA Batteries
- Brightness : Single Glow
- Colour Temperature : 2700k Warm White
- Sensor : PIR Motion Sensor
- Lumen : 15lm
- Dimensions : 7.0 x 8.5 x 2.5CM
- Magnet Included : 3M Command Magnet



# BRITZ®

## Model: EX-27



- Light source : 10W LED
- Nominal Efficacy : 1000 Lumen
- Colour Temperature : 6500K
- IP Rating : IP44
- LED Chip : 10W COB Super Bright Chip
- Input Voltage : 5V 1A
- Battery Type : Lithium Battery (4000mA)
- Rechargeable Time : 6 hours Charging Time
- Run Time : 7 hours Working Time At Low Level Brightness
- Light Output : 3 Level Of Brightness Low-Mid-High
- Charging : (Indicator Only Appears When Using & Charging)



## Usage



Equipment  
Maintenance



Construction  
Work



Backpacking



Fishing



Camping



Barbecue



Charging Cable



Cycle  
Charge



Dirtproof  
Sandproof



Shock  
Proof



Energy  
Saving



## Model: LED SOLAR WARNING LIGHT

### Description

• Weight	:	2.5kg
• Dimension	:	123mm
• Solar Panel	:	6V 3W
• Solar Panel Dimension	:	250x85mm
• Product Dimension	:	285x122x123mm
• Base Height Dimension	:	98mm
• Total Height	:	220mm
• Material	:	Polycarbonate
• Visible Distance	:	1000 meters
• Working Temperature	:	-25°C TO 65°C
• IP Rating	:	IP65 (Weatherproof)



### Dimension



Control On/Off button, user friendly  
Press and Hold to ON/OFF



Automatic solar charging for 8 Hours  
Working hours of 72 Hours

# BRITZ®

The BRITZ LED T8 Dual Voltage High Lumen Tube delivers exceptional brightness, making it perfect for marine and tunnel applications. Designed for energy efficiency and durability, it provides reliable lighting in harsh environments. Its dual voltage capability ensures versatile usage, while its high lumen output ensures optimal visibility and safety.

## Description

- Input Voltage : AC 85-265V 50/60Hz
- Power : 18W
- Light Effect : 125 lm/W
- Lumens Flux 18W : 2250 Lm
- Energy Efficiency : 2 Energy Label Tick
- Colour Temperature : 6500k
- Colour Rendering Index : Ra>80
- Efficiency : 25000Hrs
- Dimmable : No
- Diameter : 28mm
- 18W Length : 1200mm
- Direct Replace T8 Fluorescent : Yes
- Connection : Double Sided Available



**18W**



## Applications



Carpark Lighting



Retail Lighting




Weatherproof Lighting

# BRITZ®

## LED T5 INTEGRATED TUBE SET

### Description

• Input Voltage	:	AC 180-265V 50/60Hz
• Power	:	12W Or 24W
• Light Effect	:	115 lm/W
• Lumens Flux 12W	:	1380 Lm
• Lumens Flux 24W	:	2760 Lm
• Colour Temperature	:	6500k
• Colour Rendering Index	:	Ra>80
• Efficiency	:	25000Hrs
• Dimmable	:	No
• 12W Length	:	600mm
• 24W Length	:	1200mm
• Direct Plug and Play	:	Yes

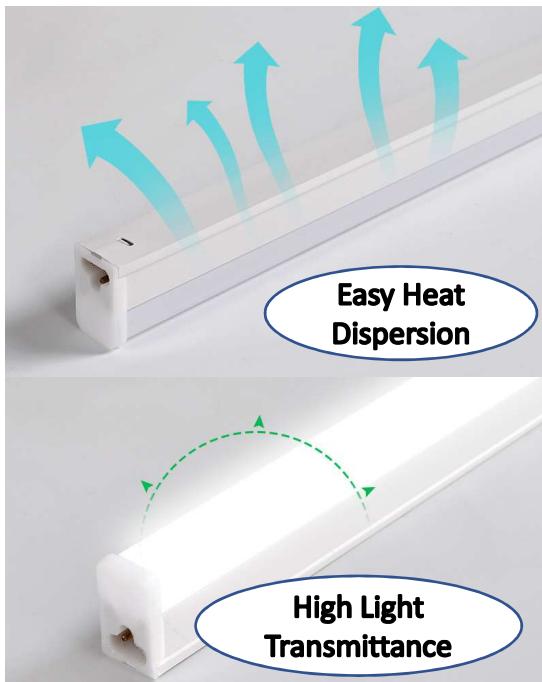

### PRODUCT DETAILS



### Applications



Anti Flash Technology



Cornice Or Cove Lighting



Up To 200W Connection

# BRITZ®

## LED T8 SINGLE & DOUBLE SLIM BATTEN FITTING



### Description

- Installation : Clip On & Screw-Less
- Length : 2FT & 4FT
- Size : 1x20 , 2x20, 1x40, 2x40
- Lighting Type : LED
- Material : Powder Coated Steel Enclosure
- Wiring Type : Double Sided / Single Sided
- Emergency Pack : Compatible

### Applications



Carpark Lighting



Retail Lighting



Corridor Lighting

# BRITZ®



DIAMETER : 16.5CM

**Model: BR-CMRD-24W**



DIAMETER : 22.5CM

**Model: BR-CMRD-36W**

ENERGY EFFICIENCY



## Description

- No extra external AC-DC driver needed; Low-heat radiation, high-end solution for ceiling lights.
- Special circuit design can resist lightning strikes, and is safe to use during thunderstorms.
- LED light module has better performance in heat dissipation, which allows delivers longer life than other LED module.
- Super bright and low-power dissipation, at least 90% energy saving.

## Features


- Energy Saving
- 360 Degrees Beam Angle High Brightness(100Lm/W)
- Extra Thick Magnet, Strong Absorption, Do Not Obstruct Wire
- Anti Flicker & True Colour
- Easy To Install, Wide Application




EXTRA  
BRIGHT



1.5CM  
↔



THICK  
MAGNET



LONG  
LASTING

# BRITZ®

## Description

- No extra external AC-DC driver needed; Low-heat radiation, high-end solution for ceiling lights.
- Special circuit design can resist lightning strikes, and is safe to use during thunderstorms.
- LED light module has better performance in heat dissipation, which allows delivers longer life than other LED module.
- Super bright and low-power dissipation, at least 90% energy saving.

## Features

- Energy Saving
- 360 Degrees Beam Angle High Brightness(100Lm/W)
- Extra Thick Magnet, Strong Absorption, Do Not Obstruct Wire
- Anti Flicker & True Colour
- Easy To Install, Wide Application
- Can be controlled by remote control

### ENERGY EFFICIENCY



A



EXTRA  
BRIGHT



1.5CM  
THICK  
MAGNET




LONG  
LASTING



DIAMETER : 21.5CM  
Model: BR-CMX2L-36W-TRI



DIAMETER : 24.5CM  
Model: BR-CMX2L-48W-TRI


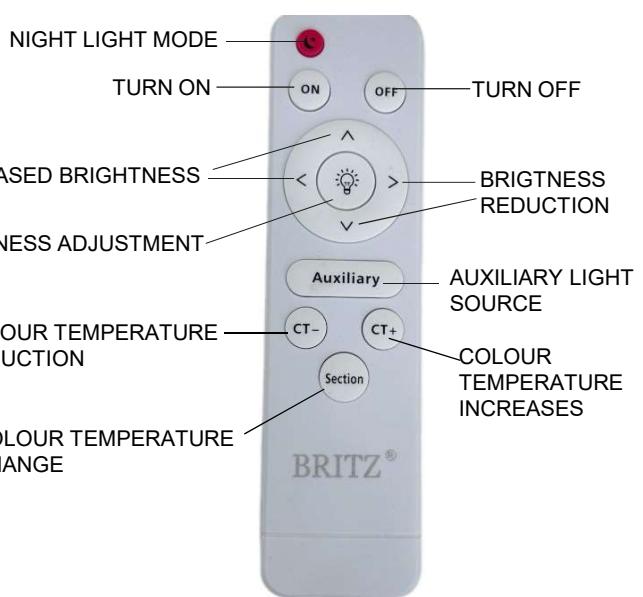


# BRITZ®

## Model: 6064 FLOODLIGHT

### Description

- Lamp Power : 50W, 100W, 200W, 300W, 400W
- Lamp Body Material : Die-cast aluminium, tempered glass
- Input : AC85-265V
- Frequency : 50Hz / 60Hz
- Lumen : 90LM / W
- LED Colour : Daylight
- LED Light Source : COB LED chip
- IP Rating : IP66 (Lamp & Gear compartments)
- Beam Angle(°) : 120° Degree
- Prewired 1Meter Rubber Cable

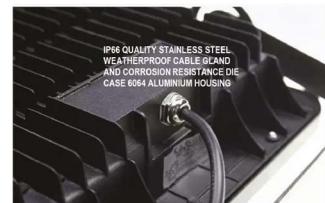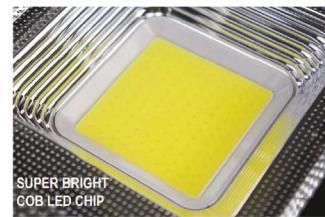





Flicking  
Free



50,000+  
hours



Ic  
Integrated  
Circuit

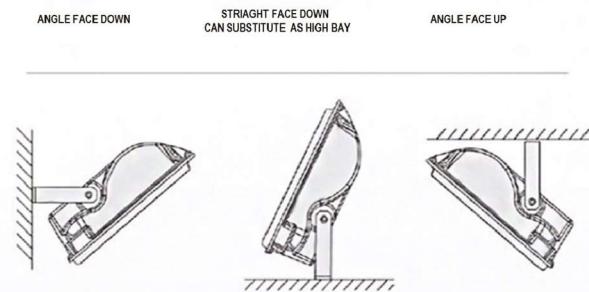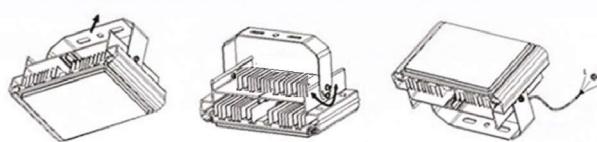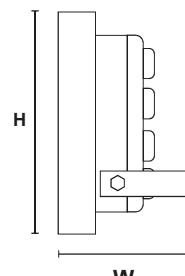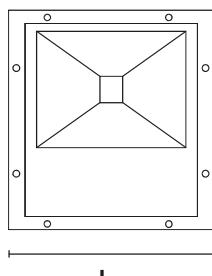

### Dimension (mm)

Model	Description	Colour	H(mm)	L(mm)	W(mm)
BR-LED-6064-50W	50W LED FLOODLIGHT	Black	270	240	68
BR-LED-6064-100W	100W LED FLOODLIGHT	Black	315	285	98
BR-LED-6064-200W	200W LED FLOODLIGHT	Black	376	340	100
BR-LED-6064-300W	300W LED FLOODLIGHT	Black	490	475	107
BR-LED-6064-400W	400W LED FLOODLIGHT	Black	595	475	110




# BRITZ®

## Model: 50W 6064 FLOODLIGHT

### Description

- Lamp Power : 50W
- Lamp Body Material : Die-cast aluminium, tempered glass
- Input : AC85-265V
- Frequency : 50Hz / 60Hz
- Lumen : 90LM / W
- LED Colour : Daylight
- LED Light Source : COB LED chip
- IP Rating : IP66 (Lamp & Gear compartments)
- Beam Angle(°) : 120° Degree
- Prewired 1Meter Rubber Cable





### PHOTOMETRIC CURVE

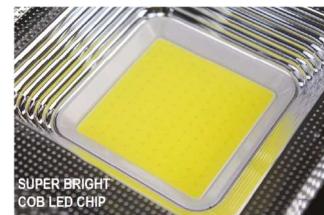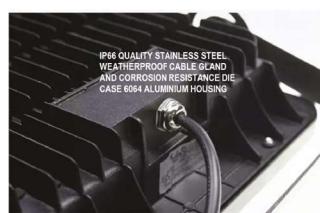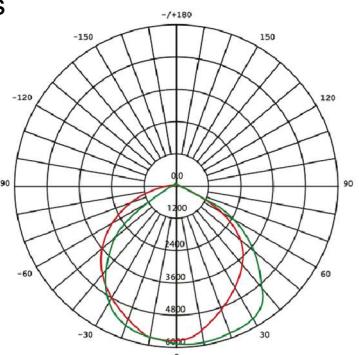

Flicking Free

50,000+ hours

IC  
Integrated Circuit

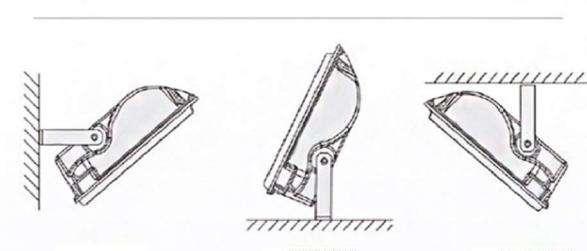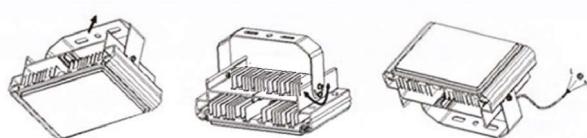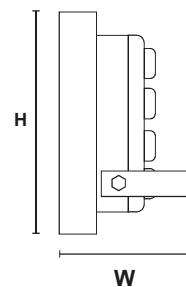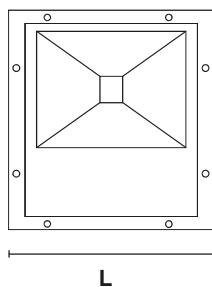

### Dimension (mm)

Model	Description	Colour	H(mm)	L(mm)	W(mm)
BR-LED-6064-50W	50W LED FLOODLIGHT	Black	270	240	68




# BRITZ®

## Model: 100W 6064 FLOODLIGHT

### Description

- Lamp Power : 100W
- Lamp Body Material : Die-cast aluminium, tempered glass
- Input : AC85-265V
- Frequency : 50Hz / 60Hz
- Lumen : 90LM / W
- LED Colour : Daylight
- LED Light Source : COB LED chip
- IP Rating : IP66 (Lamp & Gear compartments)
- Beam Angle(°) : 120° Degree
- Prewired 1Meter Rubber Cable





### PHOTOMETRIC CURVE

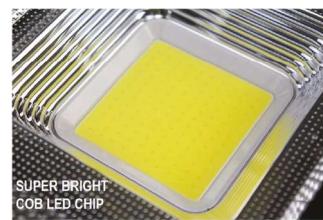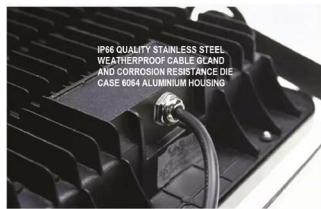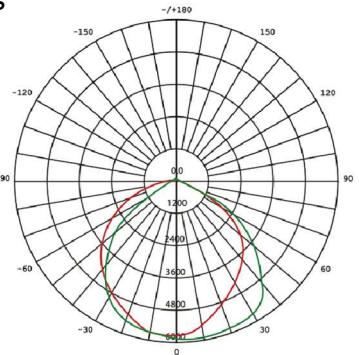

Flicking Free

50,000+ hours

Ic  
Integrated Circuit

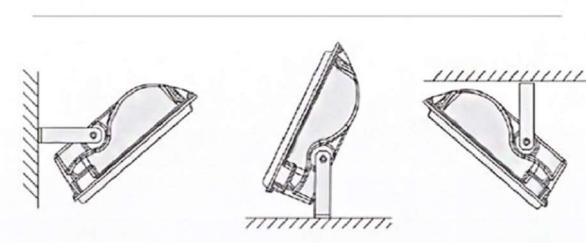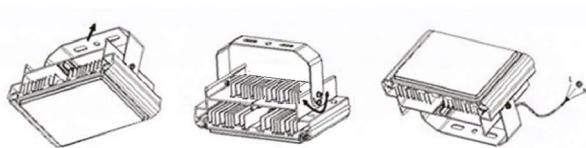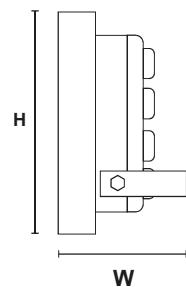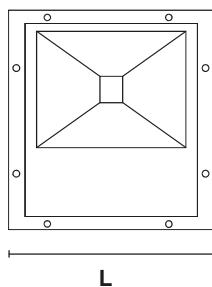

### Dimension (mm)

Model	Description	Colour	H(mm)	L(mm)	W(mm)
BR-LED-6064-100W	100W LED FLOODLIGHT	Black	315	285	98




# BRITZ®

## Model: 300W 6064 FLOODLIGHT

### Description

- Lamp Power : 300W
- Lamp Body Material : Die-cast aluminium, tempered glass
- Input : AC85-265V
- Frequency : 50Hz / 60Hz
- Lumen : 90LM / W
- LED Colour : Daylight
- LED Light Source : COB LED chip
- IP Rating : IP66 (Lamp & Gear compartments)
- Beam Angle(°) : 120° Degree
- Prewired 1Meter Rubber Cable





### PHOTOMETRIC CURVE

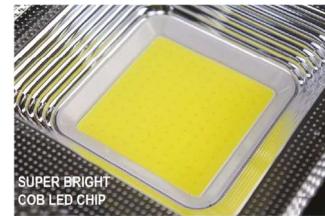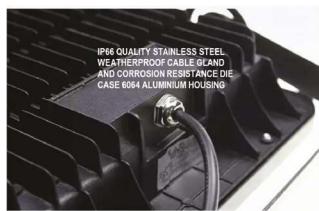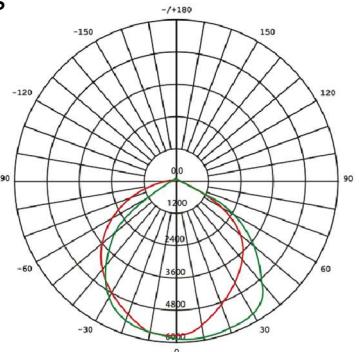

Flicking Free

50,000+ hours

Ic  
Integrated Circuit

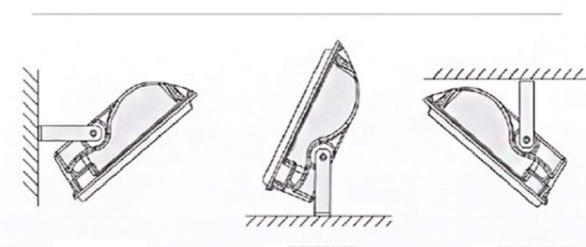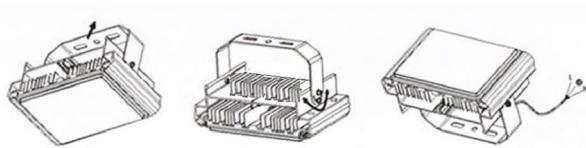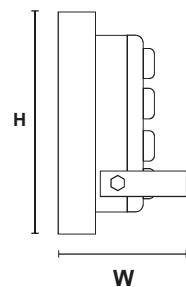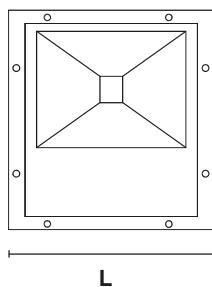

### Dimension (mm)

Model	Description	Colour	H(mm)	L(mm)	W(mm)
BR-LED-6064-300W	300W LED FLOODLIGHT	Black	490	475	107




# BRITZ®

## Model: 400W 6064 FLOODLIGHT

### Description

- Lamp Power : 400W
- Lamp Body Material : Die-cast aluminium, tempered glass
- Input : AC85-265V
- Frequency : 50Hz / 60Hz
- Lumen : 90LM / W
- LED Colour : Daylight
- LED Light Source : COB LED chip
- IP Rating : IP66 (Lamp & Gear compartments)
- Beam Angle(°) : 120° Degree
- Prewired 1Meter Rubber Cable





### PHOTOMETRIC CURVE

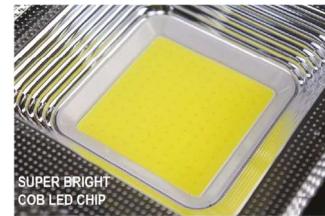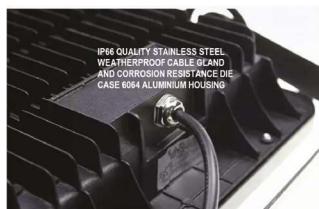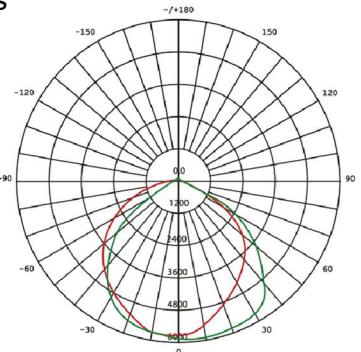

Flicking Free

50,000+ hours

Ic  
Integrated Circuit

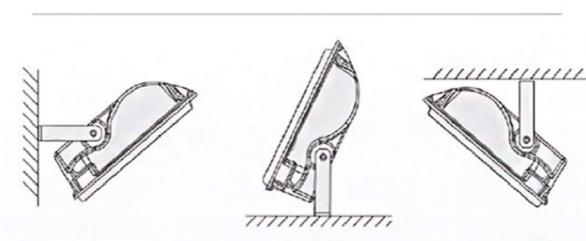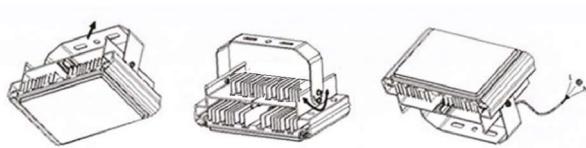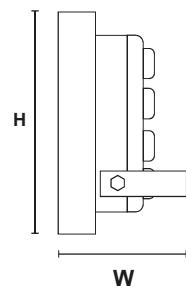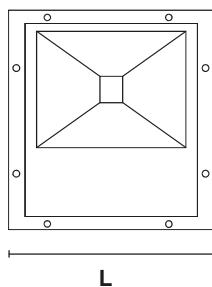

### Dimension (mm)

Model	Description	Colour	H(mm)	L(mm)	W(mm)
BR-LED-6064-400W	400W LED FLOODLIGHT	Black	595	475	110

# BRITZ®

## Model: ST FLOODLIGHT

### Description

- Lamp Power : 50W, 100W, 150W, 200W, 400W
- Lamp Body Material : Aluminium
- Cover Material : 5mm High Strength Glasses
- CRI (Ra>)Power Supply : 80
- LED Colour : AC 100V-265V
- LED Light Source : Daylight
- IP Rating : SMD Plato S
- Beam Angle(°) : IP65
- Working Lifetime(HR) : 120° Degree
- Power Factor : 50000 HR
- Prewired 1Meter Rubber Cable : 0.9




5mm High Strength Glasses  
High lumen good quality LED chip

**HEAVYDUTY WEATHERPROOF  
OUTDOOR IP65 CLASS  
1MAINTENANCE FREE PREWIRED  
WITH 1M EXTERNAL CABLE  
NEOPRENE CABLE**






### Dimension (mm)

Model	H(mm)	L(mm)	W(mm)	D(mm)
AX-FL-S T-50W	216	246	160	46
AX-FL-S T-100W	396	323	216	49
AX-FL-S T-150W	320	357	261	57
AX-FL-S T-200W	372	402	267	57
AX-FL-S T-300W	432	485	355	56
AX-FL-S T-400W	495	545	370	58

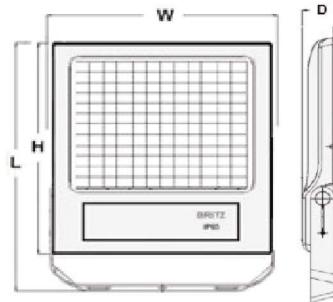

### Luminous Intensity Distribution

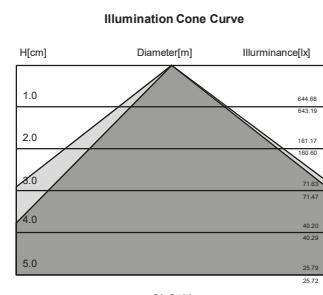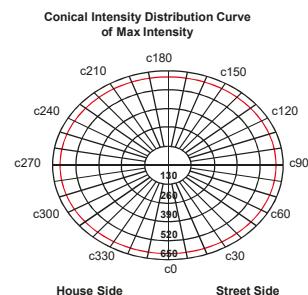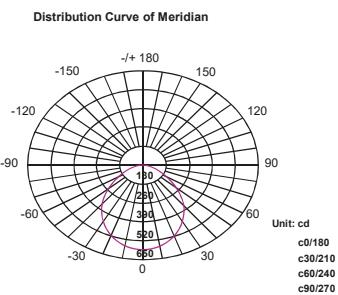

# BRITZ®

## LED Rechargeable Floodlight Tripod

### Description

- Light Source : 10W, 20W Epistar chip 90LM/W
- Input Voltage : AC100-240V or DC 12/24V (10W&20W)
- Colour Temperature : Daylight 6000K~6500K
- IP Rating : IP65
- AC/DC adapter, 12/24V car plug charger included

### Features

- Die-cast aluminium finished with durable epoxy powder coating
- Anti glare high transparency clear tempered glass
- Adjustable height from 94cm to 180cm
- Detachable light pivots 360°
- Tripod collapses for easy storage
- Lamp grid protection



### Dimension (mm)

Model	Description	Power Supply	H(mm)	L(mm)	W(mm)
BRITZ LED 1801	1X20W LED TRIPOD	230V / 50Hz	1760	825	178
BRITZ LED 1802	2X20W LED TRIPOD	230V / 50Hz	1760	825	545

# BRITZ®

## Model: XC-50W LED FLOODLIGHT

### Description



- Lamp Power : 50W
- Lamp Body Material : Aluminum+PC
- LED Colour : Daylight CRI80
- Voltage : 100-265v
- Average Lifetime : 30000-hours
- Outdoor Weatherproof : IP67 rating
- Fixture Color/Finish : Grey
- Product size(mm) : 178x152x25mm



Wide Angel Adjustment Fast Heat Dissipation



**SLIMLINE DESIGN**

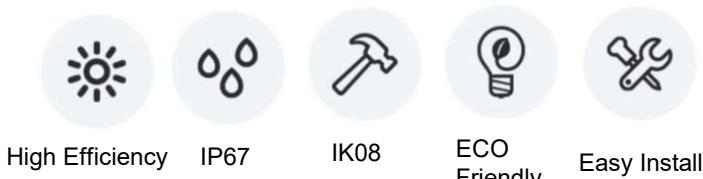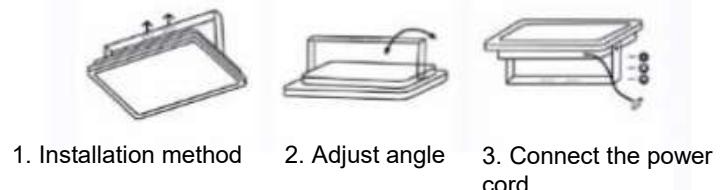

**ANGLE ADJUSTMENT  
STAINLESS STEEL NUT**



**STAINLESS  
STEEL GLAND**

# BRITZ®

## Model: XC-100W LED FLOODLIGHT

### Description



- Lamp Power : 100W
- Lamp Body Material : Aluminum+PC
- LED Colour : Daylight CRI80
- Voltage : 100-265v
- Average Lifetime : 30000-hours
- Outdoor Weatherproof : IP67 rating
- Fixture Color/Finish : Grey
- Product size(mm) : 218x181x25mm



Wide Angle Adjustment Fast Heat Dissipation



SLIMLINE DESIGN

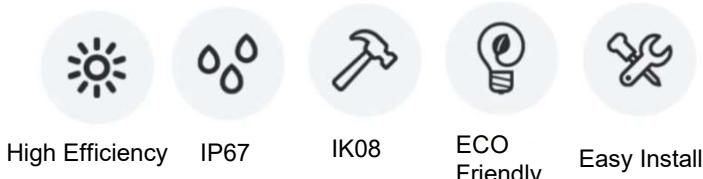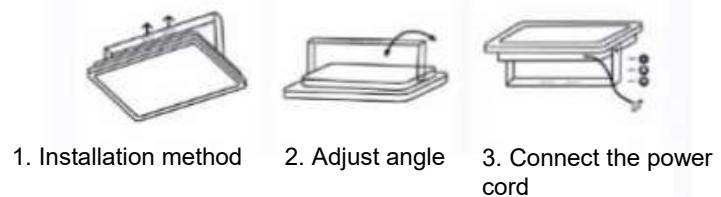


High Efficiency

IP67

IK08

ECO Friendly

Easy Install

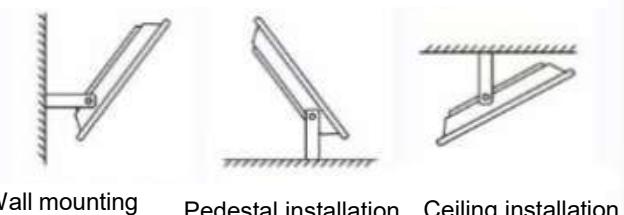

Wall mounting

Pedestal installation

Ceiling installation



ANGLE ADJUSTMENT  
STAINLESS STEEL NUT



STAINLESS  
STEEL GLAND

AUTO RESPIRATION  
VENT VALVE

# BRITZ®

## Model: XC-150W LED FLOODLIGHT

### Description




- Lamp Power : 150W
- Lamp Body Material : Aluminum+PC
- LED Colour : Daylight CRI80
- Voltage : 100-265v
- Average Lifetime : 30000-hours
- Outdoor Weatherproof : IP67 rating
- Fixture Color/Finish : Grey
- Product size(mm) : 238x192x25mm



Wide Angel Adjustment Fast Heat Dissipation



SLIMLINE DESIGN

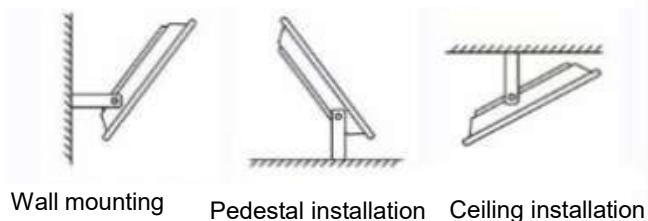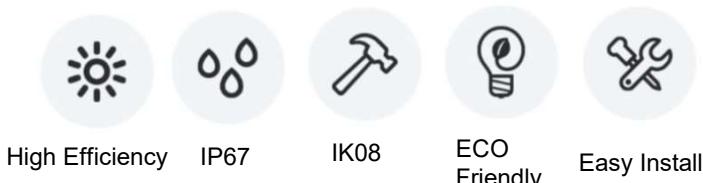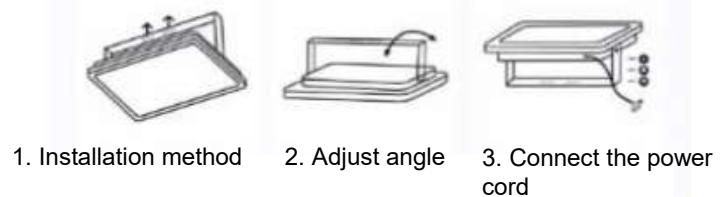

ANGLE ADJUSTMENT  
STAINLESS STEEL NUT



STAINLESS  
STEEL GLAND

AUTO RESPIRATION  
VENT VALVE

# BRITZ®

## Model: XC-200W LED FLOODLIGHT

### Description




- Lamp Power : 200W
- Lamp Body Material : Aluminum+PC
- LED Colour : Daylight CRI80
- Voltage : 100-265v
- Average Lifetime : 30000-hours
- Outdoor Weatherproof : IP67 rating
- Fixture Color/Finish : Grey
- Product size(mm) : 298x212x25mm



Wide Angel Adjustment    Fast Heat Dissipation



**SLIMLINE DESIGN**

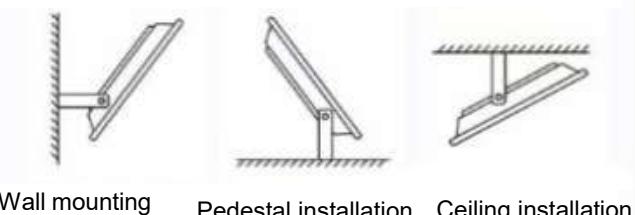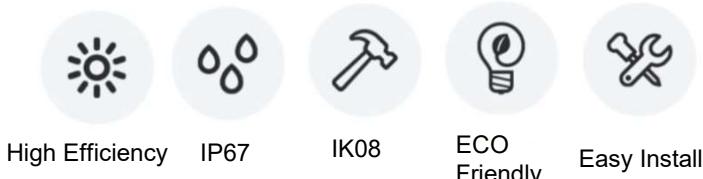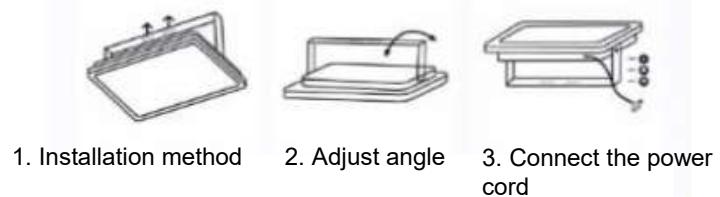

**ANGLE ADJUSTMENT  
STAINLESS STEEL NUT**



**STAINLESS  
STEEL GLAND**



**AUTO RESPIRATION  
VENT VALVE**

# BRITZ®

# 600W




## Model: XC-600W LED FLOODLIGHT

### Description

- Lamp Power : 600W
- Lamp Body Material : Aluminum+PC
- LED Colour : Daylight CRI80
- Voltage : 100-265V
- Average Lifetime : 30000-hours
- Outdoor Weatherproof : IP67 rating
- Fixture Color/Finish : Grey
- Product size(mm) : 460x570x25mm
- Weight : 5.00kg



ULTRA SLIM

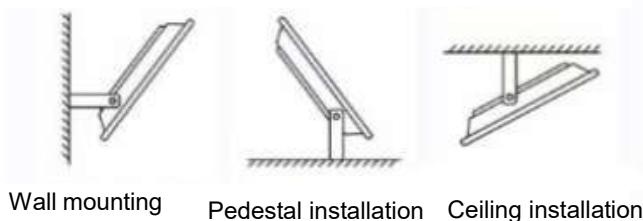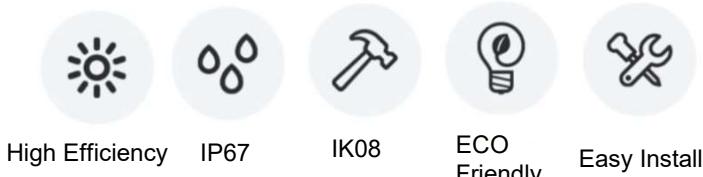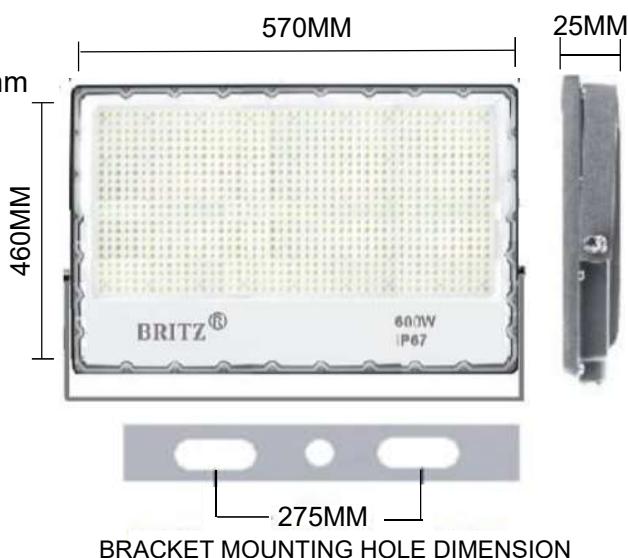

WIDE ANGLE  
ADJUSTMENT



FAST HEAT  
DISSIPATION



AUTO RESPIRATION  
VENT VALVE






# BRITZ®

## 100W LED UFO High Bay Light


Our rugged LED high-bay light features a 30,000-hour long lifespan, an IP65 protection, and the highest power efficiency (130 lm/w) high Lumen output energy saving. The product is ideal for general, task, and accent lighting, especially those with high-ceiling (5m and above). BRITZ LED strives to offer the best quality and cost performance LED lighting products available on the market

### Description

- Input voltage : AC 100-277V-50/60Hz
- Power : 100W
- Light effect : 5%
- Lumens flux : 120-140 lm/W
- Light emitting diode : 13000lm
- Color temperature : 300pcs\* SMD2835
- Color rendering index : 6000k/4000k/3000k
- Color tolerance adjustment : Ra>70
- Power factor : ≤ 10SDCM
- THD : ≥ 0.95: ≤ 15%
- Efficiency : ≥ 88%
- Working temperature : -25°C- +40°C
- Service life : 30000H
- IK protection level : IK08
- IP Protection : IP65
- Level Insulation grade : Class I
- Surge protection : 4KV

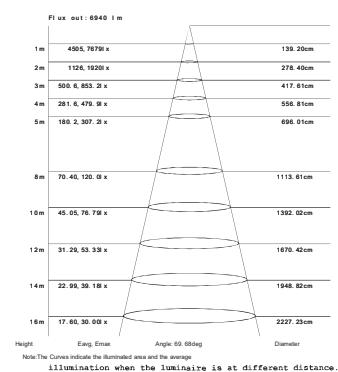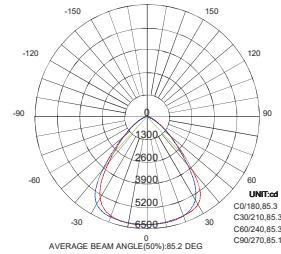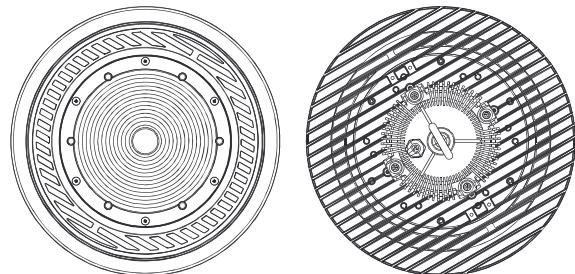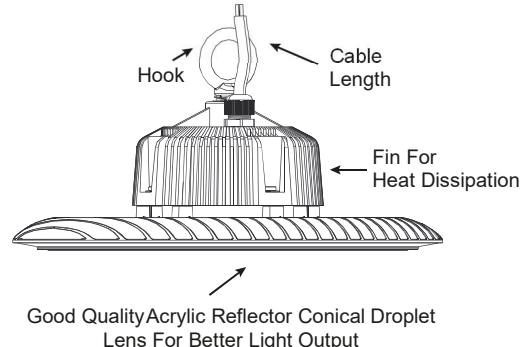

### Dimension (mm)

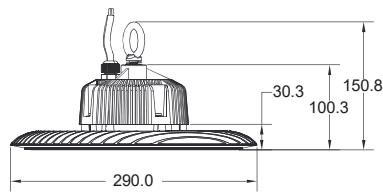



# BRITZ®

## 150W LED UFO High Bay Light

Our rugged LED high-bay light features a 30,000-hour long lifespan, an IP65 protection, and the highest power efficiency (130 lm/w) high Lumen output energy saving. The product is ideal for general, task, and accent lighting, especially those with high-ceiling (5m and above). BRITZ LED strives to offer the best quality and cost performance LED lighting products available on the market.

## Description

- |                               |   |                     |
|-------------------------------|---|---------------------|
| • Input voltage               | : | AC 100-277V-50/60Hz |
| • Power                       | : | 150W +- 5%          |
| • Light effect                | : | 120-140 lm/W        |
| • Lumens flux                 | : | 19500lm             |
| • Light emitting diode        | : | 450pcs* SMD2835     |
| • Colour temperature          | : | 6000k/4000k/3000k   |
| • Colour rendering index      | : | Ra>70               |
| • Colour tolerance adjustment | : | ≤ 10SDCM            |
| • Power factor                | : | ≥ 0.95              |
| • THD                         | : | ≤ 15%               |
| • Efficiency                  | : | ≥ 88%               |
| • Working temperature         | : | -25°C- +40°C        |
| • Service life                | : | 30000H              |
| • IK protection level         | : | IK08                |
| • IP Protection               | : | IP65                |
| • Level Insulation grade      | : | Class I             |
| • Surge protection            | : | 4KV                 |

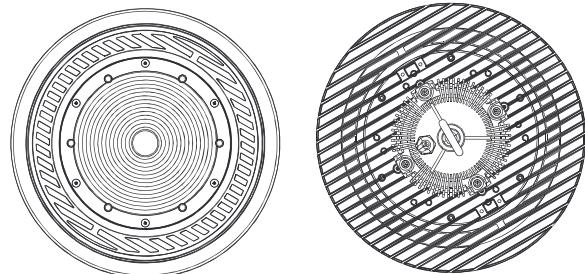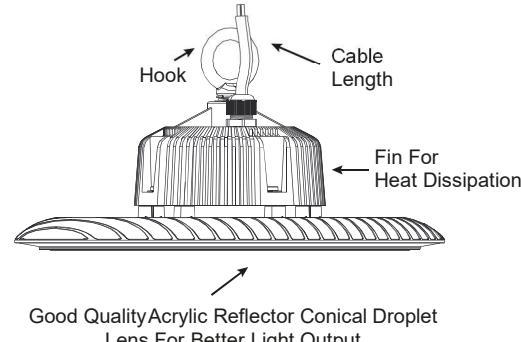

### Dimension (mm)

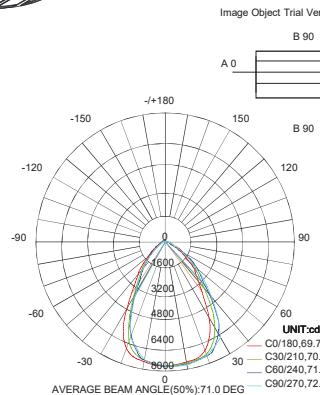
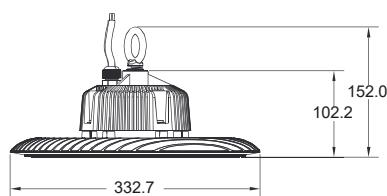



Figure 1: A polar plot showing the distribution of flux from the B90 survey. The plot is centered on the B90 survey field, with the A0 survey field to its left. The radial axis represents the angle from the B90 field, with values 150, 120, 90, 60, 30, and 0 degrees marked. The angular axis ranges from 0 to 180 degrees. The plot shows several elongated, roughly elliptical regions of flux concentration, primarily in the lower half-plane (angles 0 to 180 degrees). These regions are labeled with their respective flux values and survey names. A legend at the bottom left identifies the survey names by color: C01/180, C01/90.7, C30/120, C30/70.4, C60/240, C60/71.8, and C90/270, 72.2. A note at the bottom right states: "Note: The Curves indicate the luminosity area and the average"

# VOX


## 200W PORTABLE USB + SOLAR RECHARGEABLE LED

### Description

- Lamp Power : 200W
- Lamp Body Material : ABS Engineering Plastics
- Lithium Battery : 3.7V/10000mah
- LED Colour : Daylight 6500K
- IP Rating : IP65
- Dimension : 260x220x48mm
- Photovoltaic Panels : Polysilicon
- Lighting Time : >7Hours



Solar Energy



USB Charge



Power Bank Function

- A : Adjustable Height
- B : Battery Level Indicator
- C : SOS Warning Light (Flicking Light)
- D : LED Switch (Adjustable To ON OFF & Low High Mode)
- E : USB Charging Port (Also Able To Use As A Power Bank)
- F : Adjustable Floodlight Angle
- G : Solar Panel

# BRITZ®

## 150W LED UFO (PHILIPS DRIVER)

Our rugged LED light features a 30,000-hour long lifespan, an IP65 protection, and the highest power efficiency (130 lm/w) high Lumen output energy saving. This product is highly suitable for factories, supermarkets, exhibition halls, stadiums, etc.

### Description

• Input voltage	:	AC 100-277V 50/60Hz
• Power	:	150W
• Light Effect	:	130 Lm/W
• Lumens Flux	:	19500lm
• Light Emitting Diode	:	450pcs* SMD2835
• Colour Temperature	:	6500K
• Colour Rendering Index	:	Ra>70
• Colour Tolerance Adjustment	:	≤ 10SDCM
• Power Factor	:	≥ 0.95
• THD	:	≤ 15%
• Efficiency	:	≥ 88%
• Working Temperature	:	-25°C- +40°C
• Service Life	:	30000H
• IK Protection Level	:	IK08
• IP Protection	:	IP65
• Level Insulation Grade	:	Class I
• Surge Protection	:	4KV



Fast Heat Dissipation Low Energy Consumption IP65 High Brightness Philips Driver



### Extra Waterproof Protection



1. Thickened Waterproof Shell



2. Waterproof Rubber Gasket



3. Waterproof Plugs



4. Waterproof Lenses



Increased Radiance Range By 30%



Using Philips Led Driver

**BRITZ**®

## 200W LED UFO (PHILIPS DRIVER)

Our rugged LED light features a 30,000-hour long lifespan, an IP65 protection, and the highest power efficiency (130 lm/w) high Lumen output energy saving. This product is highly suitable for factories, supermarkets, exhibition halls, stadiums, etc.

### Description

- |                               |   |                     |
|-------------------------------|---|---------------------|
| • Input voltage               | : | AC 100-277V 50/60Hz |
| • Power                       | : | 200W                |
| • Light Effect                | : | 150 Lm/W            |
| • Lumens Flux                 | : | 30000lm             |
| • Light Emitting Diode        | : | 450pcs* SMD2835     |
| • Colour Temperature          | : | 6500K               |
| • Colour Rendering Index      | : | Ra>70               |
| • Colour Tolerance Adjustment | : | ≤ 10SDCM            |
| • Power Factor                | : | ≥ 0.9               |
| • THD                         | : | ≤ 15%               |
| • Efficiency                  | : | ≥ 88%               |
| • Working Temperature         | : | -30°C- +70°C        |
| • Service Life                | : | 30000H              |
| • IK Protection Level         | : | IK08                |
| • IP Protection               | : | IP65                |
| • Level Insulation Grade      | : | Class I             |
| • Surge Protection            | : | 4KV                 |



Fast Heat Dissipation Low Energy Consumption IP65 IK08 High Brightness Philips Driver

## Extra Waterproof Protection



## 1. Thickened Waterproof Shell



## 2. Waterproof Rubber Gasket



### 3. Waterproof Plugs



## 4. Waterproof Lenses



PHILIPS Driver  
Power Supply

## High Brightness LED Lamp Beads

### Customized Lenses



## **Increased Radiance Range By 30%**



## Using Philips Led Driver


# VOX

## 150W LED UFO

Our rugged LED light features a 30,000-hour long lifespan, an IP65 protection, and the highest power efficiency (150 lm/w) high Lumen output energy saving. The product is ideal for general, task and accent lighting especially those with high-ceiling (5m and above). The product is suitable for different area such as courtyard, storefront, store square, station, wharf, bridge, warehouse, etc.

### Description

- Power : 150W
- Input voltage : 100-240V
- Light Effect : 150 Lm/W
- Lumens Flux : 30000lm
- Led Chip : SMD2835
- Led Qty : 207pcs
- CCT : 6500K
- Colour Rendering Index : Ra80
- Power Factor : ≥ 0.9
- Working Temperature : -30°C- +70°C
- Life Time : 50000Hours
- IP Protection : IP65
- Level Insulation Grade : Class I
- Beam Angle : 90°
- Frequency : 50/60HZ
- Drive Type : BUILD IN DRIVER
- Material : PC+Aluminium
- Finish : Power Coating
- Mounting Option : Hook hanging
- Storage temperature range : -30°C- +70°C
- Storage humidity range : 80% max

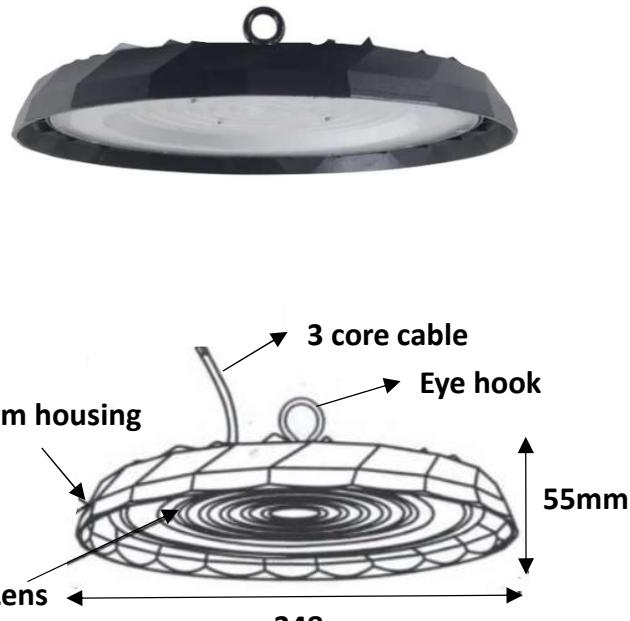



207 PC LED CHIP



BLACK POWDER COATED



90 DEG BEAM ANGLE  
HIGH HEAT DISSIPATION

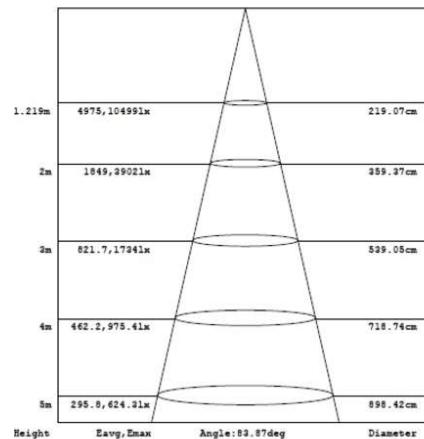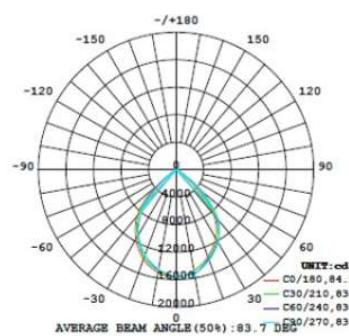

# VOX

## 200W LED UFO

Our rugged LED light features a 30,000-hour long lifespan, an IP65 protection, and the highest power efficiency (150 lm/w) high Lumen output energy saving. The product is ideal for general, task and accent lighting especially those with high-ceiling (5m and above). The product is suitable for different area such as courtyard, storefront, store square, station, wharf, bridge, warehouse, etc.

### Description

- Power : 200W
- Input voltage : 100-240V
- Light Effect : 150 Lm/W
- Lumens Flux : 30000lm
- Led Chip : SMD2835
- Led Qty : 278pcs
- CCT : 6500K
- Colour Rendering Index : Ra80
- Power Factor : ≥ 0.9
- Working Temperature : -30°C- +70°C
- Life Time : 50000Hours
- IP Protection : IP65
- Level Insulation Grade : Class I
- Beam Angle : 90°
- Frequency : 50/60HZ
- Drive Type : BUILD IN DRIVER
- Material : PC+Aluminium
- Finish : Power Coating
- Mounting Option : Hook hanging
- Storage temperature range : -30°C- +70°C
- Storage humidity range : 80% max





278 PC LED CHIP



BLACK POWDER COATED



90 DEG BEAM ANGLE  
HIGH HEAT DISSIPATION

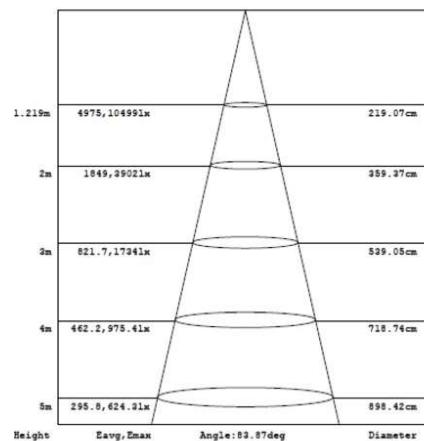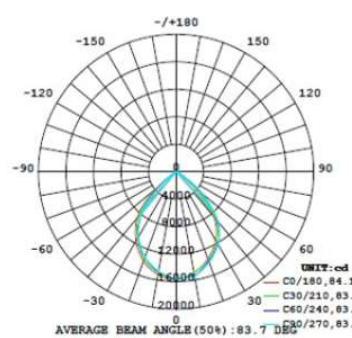

# VOX

## LED RECHARGEABLE FLOODLIGHTS (FLAT)

### Description


- Power : 20W, 30W & 50W
- Input voltage : AC 100-240V or DC 12V/24V
- Lumens/Watt : 90 Lm/W
- Lumens Flux : 1800Lm – 4500Lm
- Led Chip : Epistar Chip
- Brightness : 60% -100% Adjustable
- CCT : 6500K
- IP Protection : IP65
- Material : PC + Aluminium



CAR CHARGER &  
POWER ADAPTER INCLUDED



UPGRADED BATTERY  
UP TO 8 HOURS

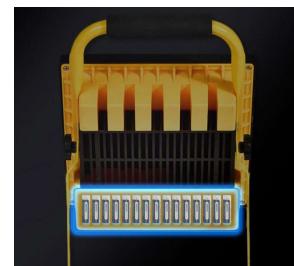


Anti-Slip  
Grip

Heat  
Dissipation

Adjustable  
Stand

Brightness  
Switch

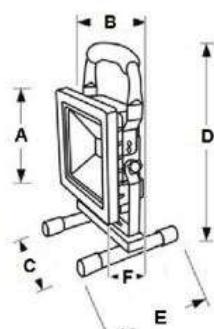

Wattage	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
10W	115	115	120	250	135	60
20W	160	160	150	300	150	65
30W	225	225	215	370	225	75
50W	225	225	215	370	225	75

# BRITZ®


## Model: 200W SOLAR LED

### Description



• Solar Panel Power	: 20W/6V
• Battery Capacity	: 18000mAH
• Color Temperature	: 6000K~6500K
• Color Rendering Index	: CRI>70
• Color Tolerance Adjustment	: ≤10SDCM
• Luminous Efficiency	: 100~130lm/W
• Light Emitting Diode	: 75pcs*SMD5050
• Net Weight Of The Lamp Body	: 1.20kg
• Net Weight Of The Solar Panels	: 1.09kg
• Cable Length	: 4.35m



### INSTALLATION DIAGRAM

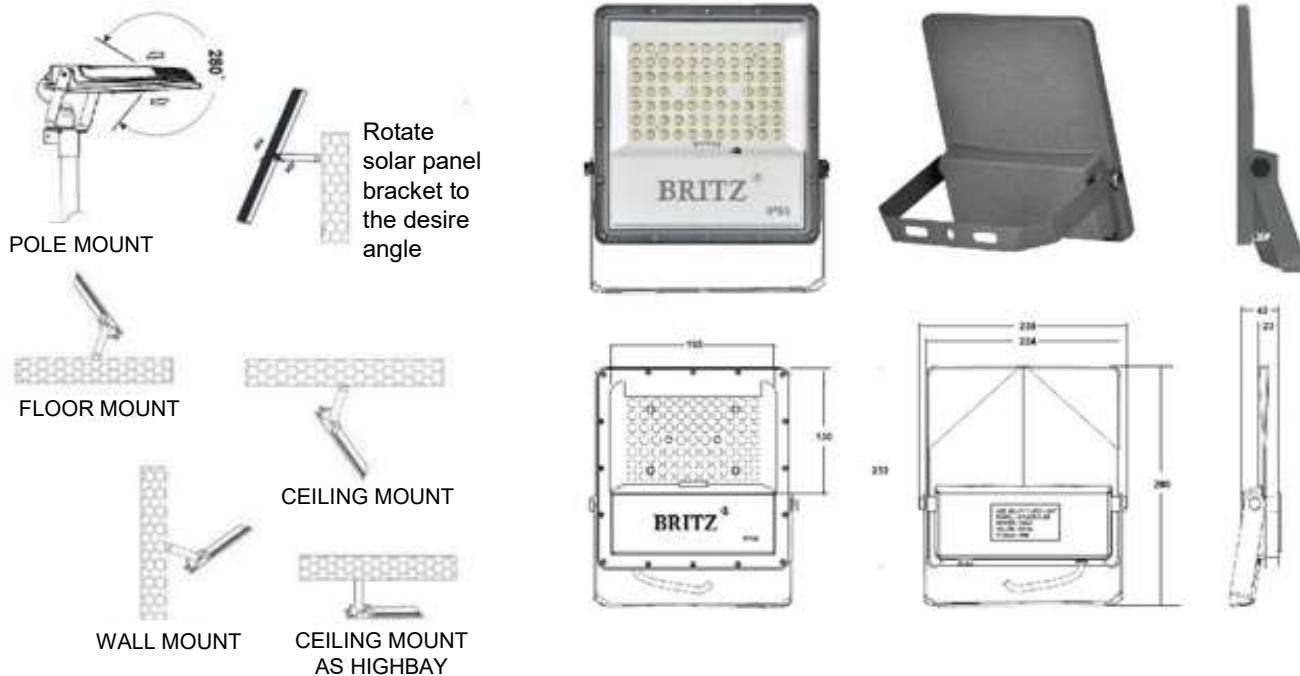

### REMOTE CONTROL DESCRIPTION

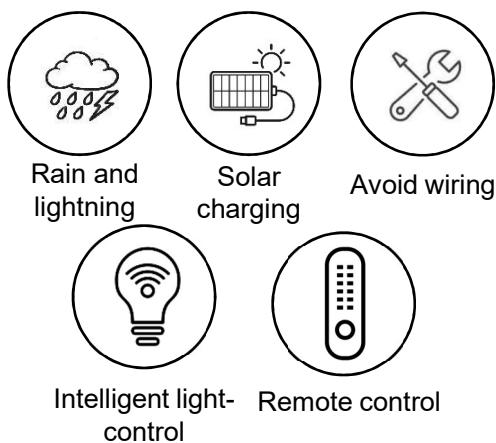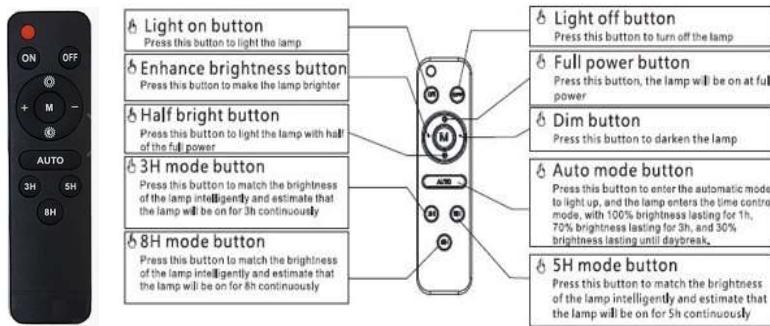

# BRITZ®

# 20W

## Model: XC-20W LED FLOODLIGHT

### Description

- |                        |   |                |
|------------------------|---|----------------|
| • Lamp Power           | : | 20W            |
| • Lamp Body Material   | : | Aluminum+PC    |
| • LED Colour           | : | Daylight CRI80 |
| • Voltage              | : | 100-265v       |
| • Average Lifetime     | : | 30000-hours    |
| • Outdoor Weatherproof | : | IP67 rating    |
| • Fixture Color/Finish | : | Grey           |
| • Product size(mm)     | : | 123x148x25mm   |
| • Weight               | : | 0.35kg         |




IP67



ULTRA SLIM



BRACKET MOUNTING HOLE DIMENSION

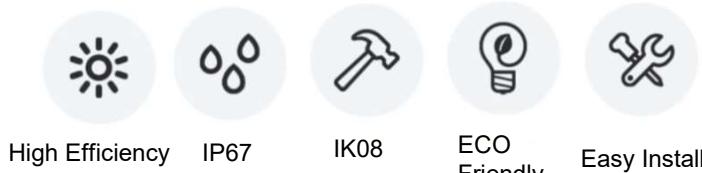

WIDE ANGLE  
ADJUSTMENT



FAST HEAT  
DISSIPATION



AUTO RESPIRATION  
VENT VALVE

# BRITZ®

# 30W

## Model: XC-30W LED FLOODLIGHT

### Description

- Lamp Power : 30W
- Lamp Body Material : Aluminum+PC
- LED Colour : Daylight CRI80
- Voltage : 100-265v
- Average Lifetime : 30000-hours
- Outdoor Weatherproof : IP67 rating
- Fixture Color/Finish : Grey
- Product size(mm) : 123x148x25mm
- Weight : 0.35kg







ULTRA SLIM



BRACKET MOUNTING HOLE DIMENSION



1. Installation method    2. Adjust angle    3. Connect the power cord

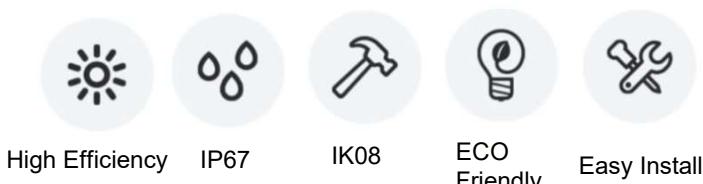

Wall mounting    Pedestal installation    Ceiling installation



WIDE ANGLE  
ADJUSTMENT



FAST HEAT  
DISSIPATION



AUTO RESPIRATION  
VENT VALVE

# BRITZ®

# 300W


## Model: XC-300W LED FLOODLIGHT

### Description


- Lamp Power : 300W
- Lamp Body Material : Aluminum+PC
- LED Colour : Daylight CRI80
- Voltage : 100-265V
- Average Lifetime : 30000-hours
- Outdoor Weatherproof : IP67 rating
- Fixture Color/Finish : Grey
- Product size(mm) : 310x415x25mm
- Weight : 2.20kg





ULTRA SLIM

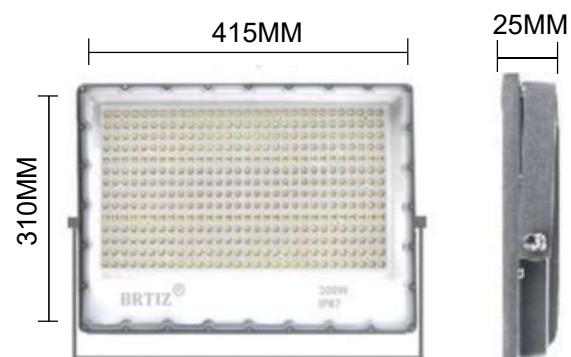

BRACKET MOUNTING HOLE DIMENSION



1. Installation method    2. Adjust angle    3. Connect the power cord



Wall mounting

Pedestal installation

Ceiling installation

High Efficiency

IP67

IK08

ECO  
Friendly

Easy Install



WIDE ANGLE  
ADJUSTMENT



FAST HEAT  
DISSIPATION



AUTO RESPIRATION  
VENT VALVE

# BRITZ®

# 400W

## Model: XC-400W LED FLOODLIGHT

### Description


- Lamp Power : 400W
- Lamp Body Material : Aluminum+PC
- LED Colour : Daylight CRI80
- Voltage : 100-265V
- Average Lifetime : 30000-hours
- Outdoor Weatherproof : IP67 rating
- Fixture Color/Finish : Grey
- Product size(mm) : 362x480x25mm
- Weight : 3.10kg





IP67



ULTRA SLIM

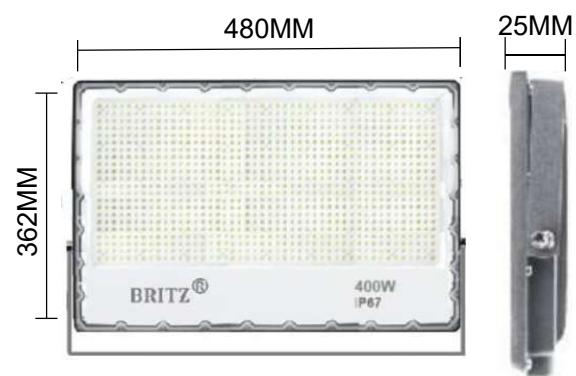

BRACKET MOUNTING HOLE DIMENSION

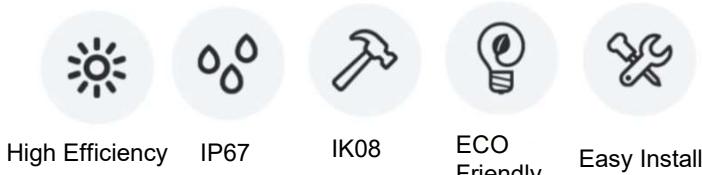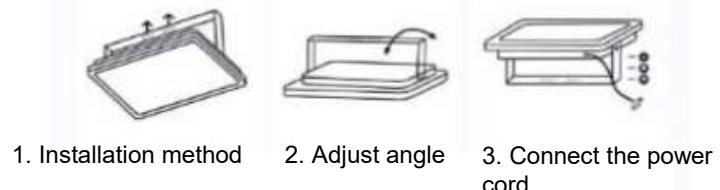

High Efficiency

IP67

IK08

ECO  
Friendly

Easy Install



WIDE ANGLE  
ADJUSTMENT



FAST HEAT  
DISSIPATION



AUTO RESPIRATION  
VENT VALVE

# BRITZ®

# 500W


## Model: XC-500W LED FLOODLIGHT

### Description

- Lamp Power : 500W
- Lamp Body Material : Aluminum+PC
- LED Colour : Daylight CRI80
- Voltage : 100-265V
- Average Lifetime : 30000-hours
- Outdoor Weatherproof : IP67 rating
- Fixture Color/Finish : Grey
- Product size(mm) : 400x570x25mm
- Weight : 4.05kg





ULTRA SLIM

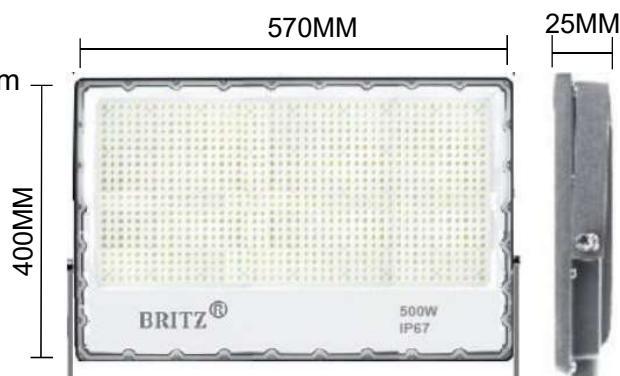

BRACKET MOUNTING HOLE DIMENSION



1. Installation method   2. Adjust angle   3. Connect the power cord

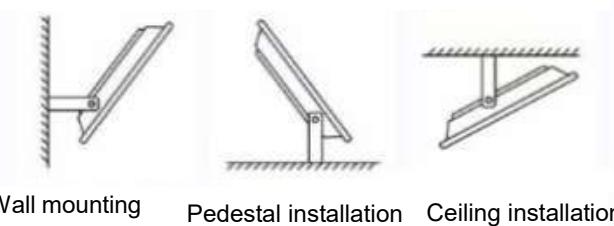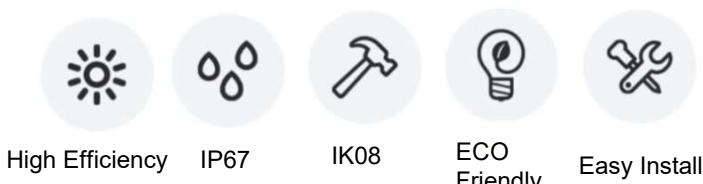

Wall mounting   Pedestal installation   Ceiling installation



WIDE ANGLE  
ADJUSTMENT



FAST HEAT  
DISSIPATION



AUTO RESPIRATION  
VENT VALVE


# VOX

**Model:**

**Weatherproof 3 Way Portable DB 40A Single Phase**





ELCB APPROVED  
WITH SAFETY MARK

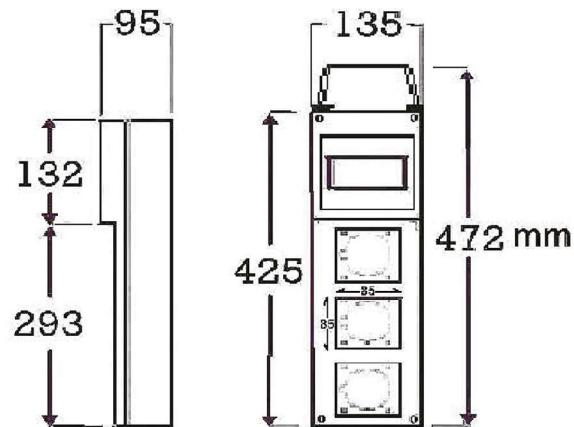

Input	Protection	Output
CEE PLUG 16A 2P+E 230V 3G2.5SG mm cable 1.8m	1RCD 40A 2P 0.03A 230V~ 3MCB 16A 1P 230V~	3 CEE Socket 16A 2P+E 230V~

# VOX

**Model:**  
**Weatherproof 4 Way Portable**  
**DB 40A Single Phase**

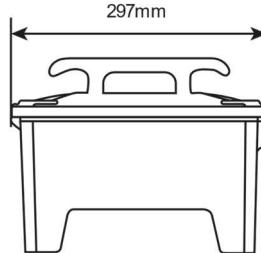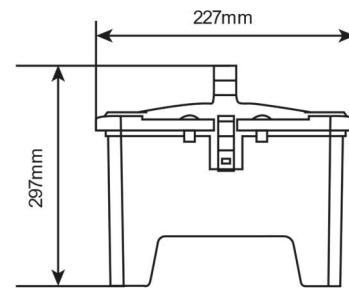

Material	Flame Retardant
Input	1pcs CEE Plug IP44 (IP67 Optional) 16A 2P+E Plug 230V~ (110v Yellow Socket outlet Optional) 3G2.5sq mm Neoprene cable (1.7meters)
Output	4 pcs 16A 2P+E Socket outlet 230V~ IP44 (IP67 Optional) (110v Yellow Socket outlet Optional)
Protection Fuse	1 pcs 32A 2P MCB 240V~ (INCOMING) 1 pcs 40A 2P Approved 6KA ELCB 0.03mA 240V~ 4 pcs 16A 2P MCB 240V~
Protection Degree	IP44 (IP67 Optional)
Compliance	EC/EN60439-1 & IEC/EN60439-4

# VOX


Model: 63A 3 PIN (2P+E) INDUSTRIAL WALL INLET



IP67 OUTDOOR  
WEATHERPROOF



- ★ Rated current: 63A
- ★ Rated voltage: AC 220-250V
- ★ No. of poles: 2P+E (3P)(3 Poles)
- ★ Protection degree: IP67
- ★ Housing material: Flame Retardant PA6 RoHS Reach
- Contact: nickel-plated brass
- ★ Standards: IEC 309-2

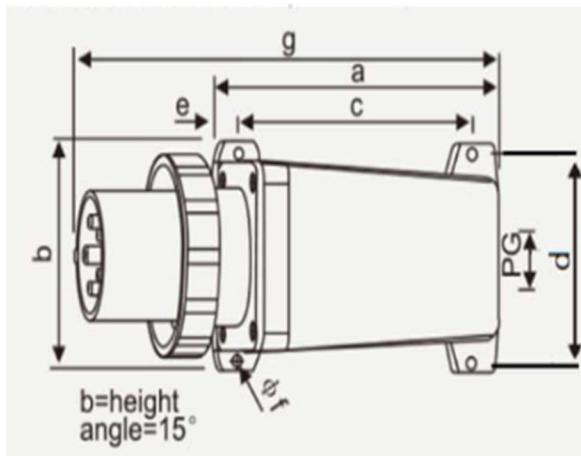


earth contact position		6H
rated current(A)		63
pole	3 PIN	
dimension(mm)	a	193
	b	124
	c	153
	d	112
	e	19
	f	6
	g	288
CABLE GLAND PG		29
cable nominal cross-section area( $\text{mm}^2$ )		6-16

# VOX

## Model:

### HEAVYDUTY OUTDOOR WEATHERPROOF DISTRIBUTION BOX

Material	Solid Unbreakable Polycarbonate With Stainless Steel Latch
Input	16A 2P+E Plug 1.7m External Cable
Output	6 No.Outlet CEE 16A 2P+E 230V
Fuse Protection	1 No.32A DP MCB / 1 NO.ELCB 40A DP 0.03 A / 6 No.16A DP MCB
Weight	5.98kg

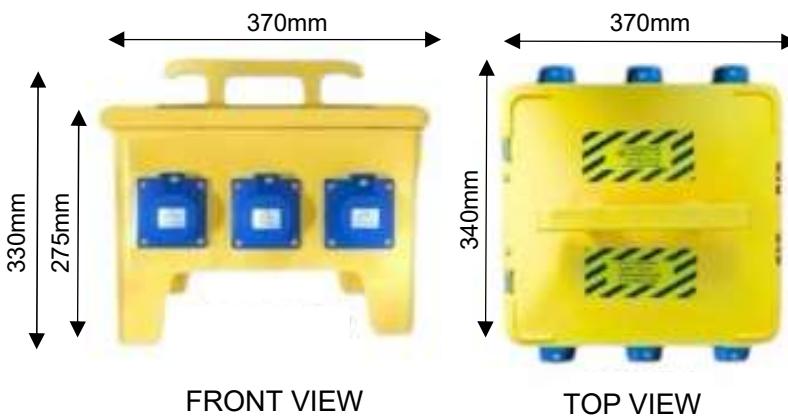

LEFT VIEW




RIGHT VIEW



INTERNAL  
MCB&ELCB  
TOP VIEW



ELCB APPROVED  
WITH SAFETY MARK




WARNING  
ELECTRICITY



# MASTERPLUG

## Safety RCD Adaptor

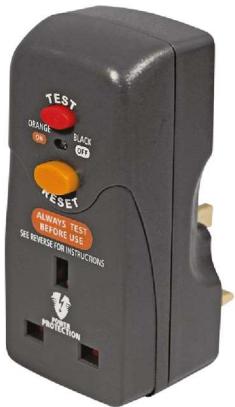

## Safety RCD Plug



## HEAVY DUTY 15 AMP PLUG





# MASTERPLUG

**Permaplug 1  
Gang 13A**



**Permaplug 2  
Gang 13A**



**Permaplug 4 Gang 13A**





# MASTERPLUG

## Model: CMU10134SL

### Description

- Easy wind handle and rear grip
- Ergonomically designed
- Integrated power switch with LED light, Thermal Cut Out
- Connected Equipment Warranty
- 13A Fused
- Switch + LED



## Model: HMU15134SL

### Description

- The four-socket extension lead has an integrated power switch with LED indicator, allowing more control over devices.
- It also has a thermal cut out which activates due to temperature rises caused by a power surge or overload, giving you peace of mind by minimising the risk of an electrical fire.
- Fixing points in the base allow the cable reel to be mounted for storage or while in use, for further versatility.



### Specification

- 4x 13A UK shutter sockets with UK plug
- 240 V
- Power on/off switch
- Power LED indicator
- Safety Thermal Cutoff
- 15m extension lead
- Easy wind handle
- Standards: BS EN 61242. ASTA Approved
- Maximum Load: 720W/240V -Fully Wound 3120W/240V - Fully Unwound



# MASTERPLUG

## MASTERPLUG SAFETY IN-LINE RCD (ELCB)

### Description

Non-latching inline RCD adapter provides added protection against electrocution. The double pole switching both live and neutral when contacts trip. This inline RCD plug will continuously monitor the power supply to an electrical appliance and will cut the power within 40 milliseconds if an earth current fault is detected. The adapter has a current rating of 13A and voltage rating of 240V ac. It has IP65 rating protection for added safety.

### Plug to cable in





Cable out to equipment

### Features and Benefits

- The four-socket extension lead has an integrated power switch with LED indicator, allowing more control over devices.
- It also has a thermal cut out which activates due to temperature rises caused by a power surge or overload, giving you peace of mind by minimising the risk of an electrical fire.
- Fixing points in the base allow the cable reel to be mounted for storage or while in use, for further versatility.

174mm

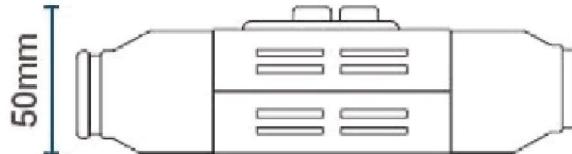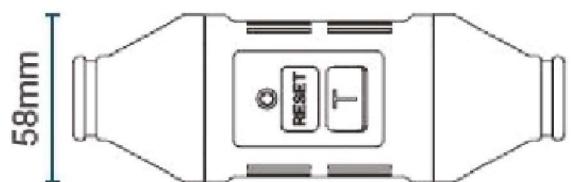

### Specification

• Current Rating	13A
• Inline	Yes
• IP Rating	IP65
• Pole Format	2
• Tripping Current	30mA 40ms
• Tripping Time	Non-Latching
• Type	240V ac
• Voltage Rating	3120W
• Maximum Load	
• Standards Met	BS7071:1992




# BRITISH GENERAL

## British General 2 Gang Moulded Neo Slimline 13A Switched Double Socket with USB Charger



## British General 1 Gang Moulded Neo Slimline 13A Switched Double Socket with USB Charger

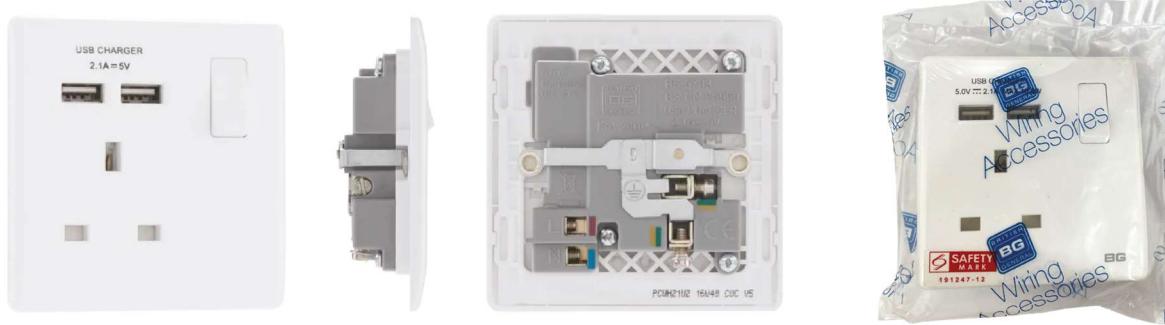

# VOX

---



**WHITE VOX**  
**3X40/0076 VOX**  
**3X70/0076**



**BLACK**  
**VOX 3X40/0076**  
**VOX 3X70/0076**  
**VOX 3X110/0076**



**GREY**  
**VOX 3X40/0076**  
**VOX 3X70/0076**  
**VOX 3X110/0076**

# BRITZ®



**MACRO 2X16 076 WHITE PVC/PVC  
BRITZ 2X16 076 BLACK PVC/PVC  
BRITZ 2X16 076 GREY PVC/PVC**

**BRITZ 2X23 076 WHITE PVC/PVC  
BRITZ 2X23 076 BLACK PVC/PVC  
BRITZ 2X40 076 WHITE PVC/PVC**



**BRITZ 2X23 015 TWISTED  
BRITZ 2X23 076 TWISTED**

**MACRO 2X23 076 B/R FLAT  
MACRO 2X40 076 B/R FLAT**



**BRITZ 2X40 076 TWISTED**

# BRITZ®

---



**BLACK Neoprene 3 core 1.5mm**



**BLACK Neoprene 3 core 2.5mm**

# BRITZ®



## Features


- Full plastic louver fan
- PP plastic and frame
- 100% copper motor stable and silence
- Easy to install and clean

## Specification


Model	Specification (mm)	Voltage/Frequency (V/Hz)	Watt (W)	Speed (RPM)	Air delivery (m <sup>3</sup> /b)	Watt (W)
BR-EF6	150	220-240V 50HZ	23	1700 - 2100	4.3	23
BR-EF8	200	220-240V 50HZ	28	1300 - 1500	7.0	28
BR-EF10	250	220-240V 50HZ	36	1700 - 2100	4.3	36
BR-EF12	300	220-240V 50HZ	48	1300 - 1500	7.0	48

## Dimension (mm)


Model	A dia.	B sq.	C	D	E
BR-EF6	150	240	190	95	43
BR-EF8	200	295	245	95	43
BR-EF10	250	340	295	95	43
BR-EF12	300	398	340	95	43

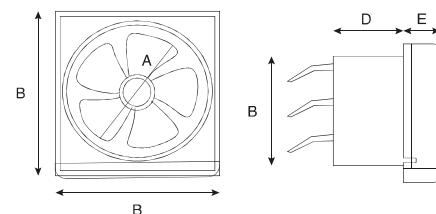

## Installation Instruction

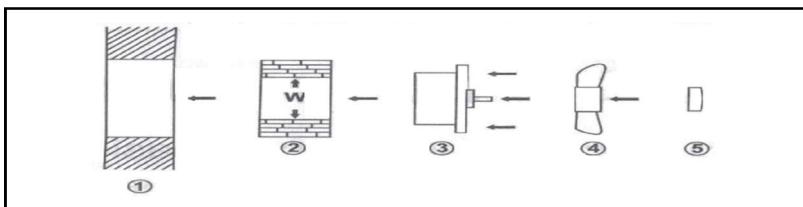

## Wiring Diagram

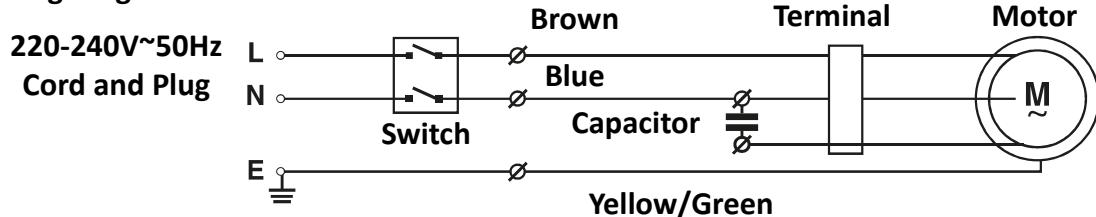

# BRITZ®



## Features


- Exhaust type
- Pull String Immediate Activation
- 100% Pure Copper Motor Guaranteed
- Low Noise Energy Saving
- Easy detachable design for easy cleaning

## Specification


Model	Specification (mm)	Voltage/Frequency (V/Hz)	Rated Power (W)	Air delivery (m <sup>3</sup> /min)	Speed (RPM)
BR-REF6	150	220-240V 50HZ	14	4.3	1700 - 2100
BR-REFS	200	220-240V 50HZ	18	7.0	1300 - 1500

## Dimension (mm)

Model	A dia.	B sq.	C	D	E
BR-REF6	208	177	44	41	89
BR-REFS	272	238	50	55	126

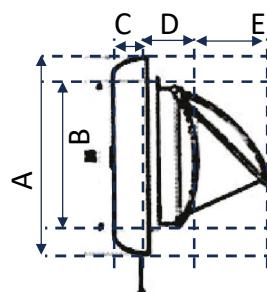

## Wiring Diagram

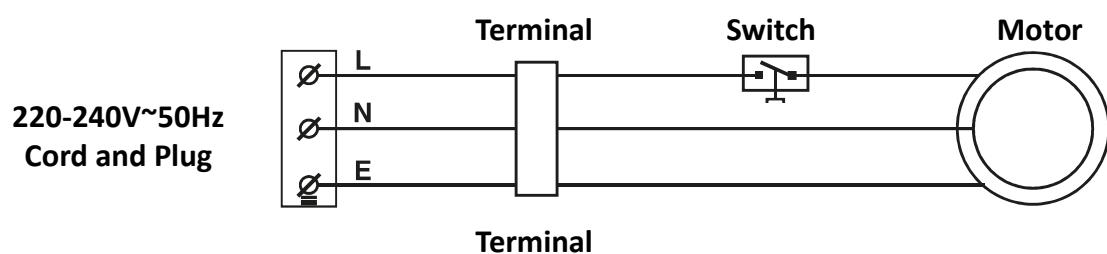

# MAXOX

WIDE PROFILE WEATHERPROOF FIXTURE

## IP65 WATERPROOF FITTING



### Conforms To The Following Standards:



IEC 60598-1  
IEC 60598-2  
IEC 60529  
IEC 60695



### TECHNICAL FEATURES

- IP65 Rating
- Stainless Steel Clip
- Polycarbonate Body
- UV Resistant Polycarbonate Diffuser
- Works for LED Tube or Fluorescent Tube

### DIMENSIONS

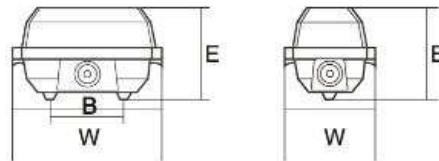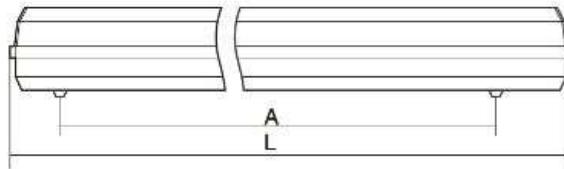

### Available In The Following Wiring

Single Ended  
Double Ended

### Technical Parameter

Model	Length (mm)	Width (mm)	Extends (mm)	Power (W)	Clips (pcs)	A1 (mm)
F7118H	650	96	93	1X15W	3	480
F7218H	650	130	93	2X15W	3	480
F7136H	1260	96	93	1X24W	5	480
F7236H	1260	130	93	2X24W	5	480



SLIM PROFILE WEATHERPROOF FIXTURE

# IP65 WATERPROOF FITTING



## Conforms To The Following Standards:

IEC 60598-1  
IEC 60598-2  
IEC 60529  
IEC 60695





## TECHNICAL FEATURES

- IP65 Rating
- Stainless Steel Clip
- Polycarbonate Body
- UV Resistant Polycarbonate Diffuser
- Works for LED Tube or Fluorescent Tube

## Available In The Following Wiring

Single Ended  
Double Ended

## DIMENSIONS

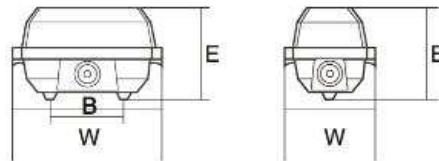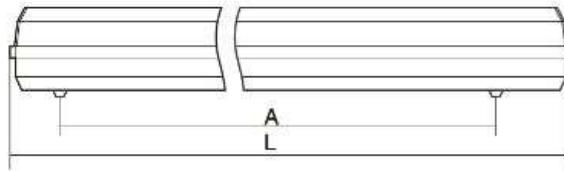

## Technical Parameter

Model	Length (mm)	Width (mm)	Extends (mm)	Power (W)	Clips (pcs)	A1 (mm)
2118L	664	66	73	1X15W	4	420
2218L	664	102	73	2X15W	4	420
2136L	1272	66	73	1X24W	7	420
2236L	1272	102	73	2X24W	7	420

# BRITZ®



## Double Wall Electric Kettle Model: BR-K171SC

### Description

- Voltage : 220-240V 50-60HZ
- Power : 1800W-2200W
- Volume : 1.7L
- Double Wall : Cool Touch



Double-Walled  
Kettle With  
Insulating Layer



Automatic Dry  
Boil Protection



SUS304 Food-  
Grade Stainless  
Steel

# BRITZ®



## Double Wall Digital Glass Kettle

Model: BR-K172GCD



### Description

- Voltage : 220-240V 50-60HZ
- Power : 1800W-2200W
- Volume : 1.7L
- Double Wall : Cool Touch
- Display : LED Full Colour
- Temperature : 4 Preset + Self Adjust
- Keep Warm : Yes



Double-Wall Kettle with insulating Layer



Built-In Mesh Filter



Heat-Resistant Borosilicate Glass Interior (Food Grade)



Keep Warm Function



Colour LED Touch Display Control



Built-in OTTER Kettle Controller

# BRITZ®



## Double Wall Electric Kettle Model: BR-K173SC

### Description

- Voltage : 220-240V 50-60HZ
- Power : 1500W-1800W
- Volume : 1.7L
- Double Wall : Cool Touch



Double-Walled  
Kettle With  
Insulating Layer



Automatic Dry  
Boil Protection



SUS304 Food-  
Grade Stainless  
Steel

# BRITZ®



## Electric Glass Kettle

### Model: BR-K175G

#### Description

- Voltage : 220-240V 50-60HZ
- Power : 1850W-2200W
- Volume : 1.7L
- LED : Blue Ring



Anti – Scald Lid Opening



Cordless Kettle  
With 360°  
Swivel Base



SUS304 Food-  
Grade Stainless  
Steel High  
Borosilicate Glass  
Interior

# BRITZ®



## Electric Kettle

### Model: BR-K181S

#### Description

- Voltage : 220-240V 50-60HZ
- Power : 1500W
- Volume : 1.8L
- Led : Red Ring



Anti – Scald Lid Opening



Cordless Kettle With 360° Swivel Base



SUS304 Food-Grade Stainless Steel High Borosilicate Glass Interior

# BRITZ®



## Electric Kettle

### Model: BR-K182S

#### Description


- Voltage : 220-240V 50-60HZ
- Power : 1500W
- Volume : 1.8L
- Led : Red Ring



Anti – Scald Lid  
Opening



Cordless Kettle  
With 360°  
Swivel Base

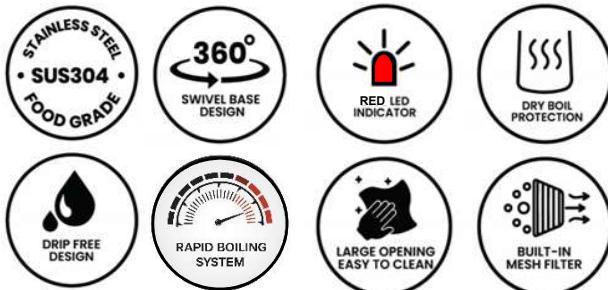

SUS304 Food-  
Grade Stainless  
Steel High  
Borosilicate Glass  
Interior